



TECHNICAL DATA / FEATURES

- dimensions: 271x44x36
- function markings: ML
- luminous flux of the LED module: 2200 lm
- luminous flux of the lamp: 1800 lm
- maximum power: 15W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 10 x LED
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: -
  - other: protection:
    - against overheating
    - against reverse polarisation



ADDITIONAL INFORMATION

They are used to illuminate the maneuvering area around trucks, trailers, semi-trailers, special and commercial vehicles.




They are approved as manoeuvring lamps (ML) in accordance with Regulation R148.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

It is possible to install needed connectors on wire (on request).

DIMENSIONS

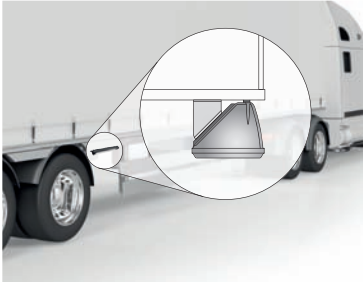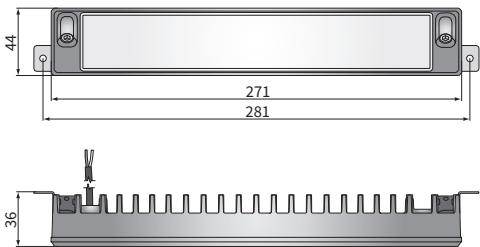

Cat. number	Homologation code	Luminous flux	2200 lm	1400 lm	IP rating	IP67	IP69K	housing	black	white	red	amber	Accessories	LED module 12V-24V	cable 0.5 m	Connectors	Deutsch DT	AMP SuperSeal 1,5	Packaging / pc	carton box
CRP1D.59150	121	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	1