



HP1A additional lamps

TECHNICAL DATA / FEATURES

dimensions: 195x96x73
 light functions: fog light, driving
 function markings: B, HR
 reference mark: -, 17.5
 source of light: H3
 maximum power: 70W
 nominal voltage: 12V-24V DC
 optics: standard
 IP rating: IP54
 housing's material: plastic
 housing's colour: black
 lens' material: glass
 lens' colour: clear, amber
 mounting: M8
 built-in connectors: -
 other: stone guard
 the mount steel-reinforced



DIMENSIONS

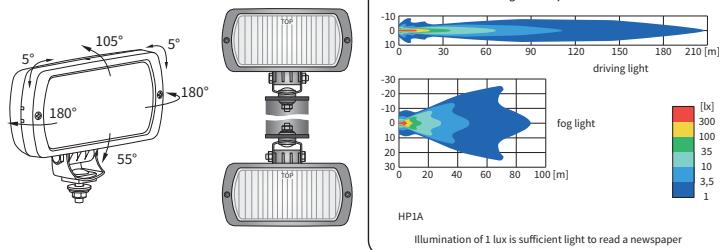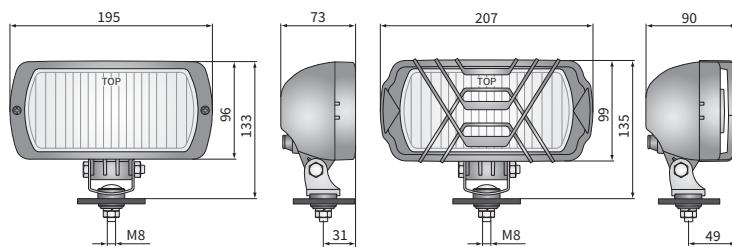

To be mounted at the front of the car or truck. They can be installed in an upright or upside down position.

E8 approval mark refers to halogen driving lights and E11 mark refers to halogen fog lights.

It is possible to install needed connectors on wire (on request).

Useful parts while installing:

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
deutsch plug DT06-2S 2-pin - cat. No. A.07135

| Cat. number | Homologation code | Light functions | | | Lens colour | Accessories | Side | Connectors |
|-------------------|-------------------|-----------------|---------|---|-------------|-------------|-------|-------------------|
| | | fog light | driving | ✓ | | | | |
| HP1A.46900 | 001 | ✓ | ✓ | ✓ | clear | bulb H3 12V | right | AMP Faston 250 |
| HP1A.46910 | 001 | ✓ | ✓ | ✓ | amber | bulb H3 24V | left | Deutsch DT |
| HP1A.46901 | 001 | ✓ | ✓ | ✓ | | ✓ | | AMP SuperSeal 1,5 |
| HP1A.46911 | 001 | ✓ | ✓ | ✓ | | ✓ | | Packaging / pc |
| HP1A.46920 | 001 | ✓ | ✓ | ✓ | | ✓ | | carton box |
| HP1A.46930 | 001 | ✓ | ✓ | ✓ | | ✓ | | blister pack |
| HP1A.46921 | 001 | ✓ | ✓ | ✓ | | ✓ | | |
| HP1A.46931 | 001 | ✓ | ✓ | ✓ | | ✓ | | |
| HP1A.46940 | 003 | ✓ | ✓ | ✓ | | ✓ | | |
| HP1A.46950 | 003 | ✓ | ✓ | ✓ | | ✓ | | |
| HP1A.46941 | 003 | ✓ | ✓ | ✓ | | ✓ | | |
| HP1A.46951 | 003 | ✓ | ✓ | ✓ | | ✓ | | |
| HP1A.46960 | 003 | ✓ | ✓ | ✓ | | ✓ | | |
| HP1A.46970 | 003 | ✓ | ✓ | ✓ | | ✓ | | |
| HP1A.46961 | 003 | ✓ | ✓ | ✓ | | ✓ | | |
| HP1A.46971 | 003 | ✓ | ✓ | ✓ | | ✓ | | |