

TECHNICAL DATA / FEATURES

dimensions:	537x47x62
luminous flux of the LED module:	14000 lm, 8000 lm
luminous flux of the lamp:	11200 lm, 6400 lm
maximum power:	160W, 1.6W, 76W
nominal voltage:	12V-24V DC
permissible power supply voltage:	10.5V-30V DC
source of light:	18 x LED
colour temperature:	5000-7000K
light distribution angle:	72° x 22°
IP rating:	IP67, IP69K
work temperature:	-40°C - +80°C
housing's material:	aluminium
lens' material:	plastic
built-in connectors:	-
other:	protection:
	• against overheating
	• against reverse polarisation



ADDITIONAL INFORMATION


Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.
Correct polarity required.


Because of significant power, CDP1D work lamp must have good airflow ensured. Otherwise, temporary limitation of maximal power may occur.

It is possible to install needed connectors on wire (on request).

DIMENSIONS

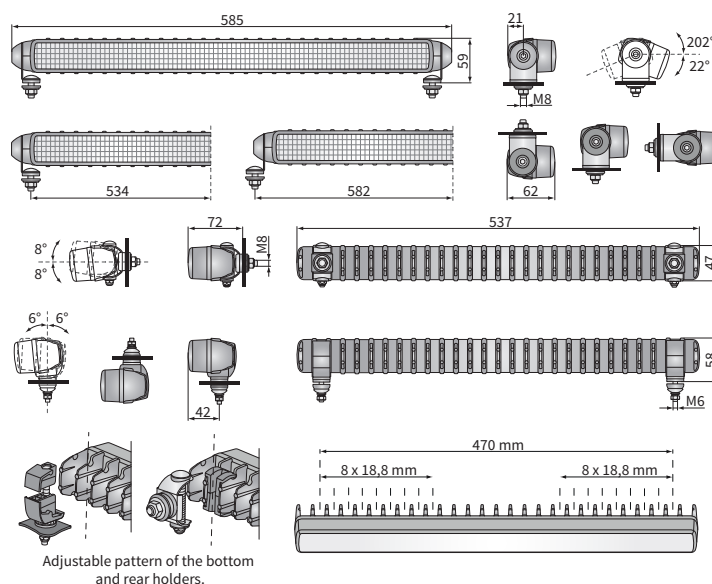

Illumination of 1 lux is sufficient light to read a newspaper
Lamp positioning: 8° from the vertical plane h=2,5m

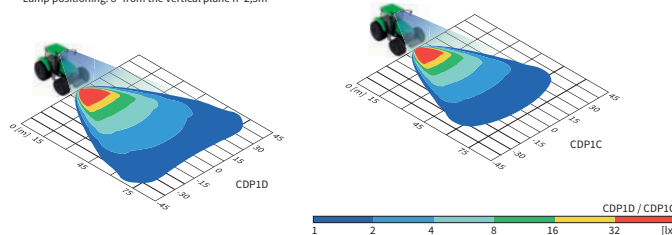

Cat. number	Light functions	work light	position	Luminous flux	14000 lm	8000 lm	Rated power	160W	76W	IP rating	IP67	IP69K	Accessories	LED module 12V-24V	cable 0,5 m	cable 8 m	Type of bracket	rear	bottom	side	Connectors	Deutsch DT	AMP SuperSeal 1,5
CDP1D.60200		✓	✓		✓			✓			✓	✓		✓	✓			✓					
CDP1D.60230		✓	✓		✓			✓			✓	✓		✓	✓				✓				
CDP1D.60260		✓	✓		✓			✓			✓	✓		✓	✓					✓			
CDP1D.60280		✓	✓		✓			✓			✓	✓		✓	✓			✓	✓	✓			
CDP1C.57800		✓	✓			✓			✓		✓	✓		✓	✓			✓					
CDP1C.57830		✓	✓			✓			✓		✓	✓		✓	✓				✓				
CDP1C.57860		✓	✓			✓			✓		✓	✓		✓	✓					✓			
CDP1C.57880		✓	✓		✓			✓			✓	✓		✓	✓			✓	✓	✓			