

HOS2 driving lights "LED RING"

TECHNICAL DATA / FEATURES

dimensions: $\phi 183 \times 97$
 light functions: driving, parking
 function markings: HR, A
 reference mark: 25
 source of light: H3, T4W (LED)
 maximum power: 70W, 4W
 nominal voltage: 12V-24V DC
 optics: standard
 IP rating: IP56
 housing's material: plastic
 housing's colour: black, chrome-plated
 lens' material: glass
 lens' colour: clear, blue
 mounting: M10
 built-in connectors: -
 other: the mount steel-reinforced blister pack (option)



ADDITIONAL INFORMATION

To be mounted at the front of the car or truck. They shall be installed in an upright position.

The bracket parts, in chrome-plated version, are made of Inox steel.



Equipped with optical fiber ring as a position light that creates an attractive appearance.

It is possible to install needed connectors on wire (on request).

Replacement parts:

parking light bulb holder - cat. No. 001.025.05.10
 bulb T4W 12V BA9s (LED) - cat. No. A.23751
 bulb T4W 24V BA9s (LED) - cat. No. A.23752

DIMENSIONS

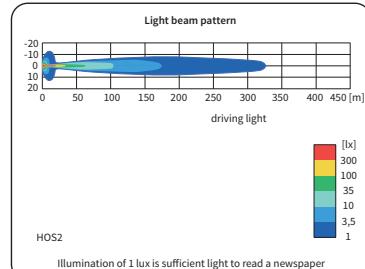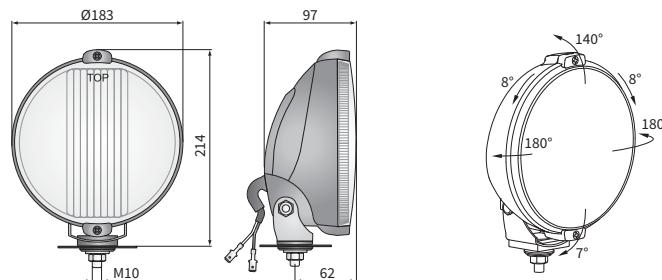

Cat. number	Homologation code	Light functions	Lens colour	housing	Accessories	Side	Connectors	Packaging / pc	carton box
HOS2.38800	043	✓ ✓	✓	✓	bulb H3 12V	✓	AMP Faston 250	1	1
HOS2.38806	043	✓ ✓	✓	✓	bulb H3 24V	✓	Deutsch DT	1	1
HOS2.38801	043	✓ ✓	✓	✓	bulb T4W/LED 12V	✓	AMP SuperSeal 1,5	1	1
HOS2.38802	043	✓ ✓	✓	✓	bulb T4W/LED 24V	✓		1	1
HOS2.38803	043	✓ ✓	✓	✓	cable 0,15 m	✓		1	1
HOS2.38807	043	✓ ✓	✓	✓		✓		1	1
HOS2.38804	043	✓ ✓	✓	✓		✓		1	1
HOS2.38805	043	✓ ✓	✓	✓		✓		1	1
HOS2.38810	043	✓ ✓	✓	✓		✓		1	1
HOS2.38816	043	✓ ✓	✓	✓		✓		1	1
HOS2.38811	043	✓ ✓	✓	✓		✓		1	1
HOS2.38812	043	✓ ✓	✓	✓		✓		1	1
HOS2.38813	043	✓ ✓	✓	✓		✓		1	1
HOS2.38817	043	✓ ✓	✓	✓		✓		1	1
HOS2.38814	043	✓ ✓	✓	✓		✓		1	1
HOS2.38815	043	✓ ✓	✓	✓		✓		1	1