

TECHNICAL DATA / FEATURES

dimensions: 105x105x50
 luminous flux of the LED module: 1600 lm, 800 lm
 luminous flux of the lamp: 1300 lm, 650 lm
 maximum power: 22W, 11W
 nominal voltage: 12V-24V DC
 permissible power supply voltage: 10.5V-30V DC
 source of light: 12 x LED, 6 x LED
 colour temperature: 4000-6000K
 light distribution angle: 28° x 28°, 50° x 30°
 IP rating: IP67, IP69K
 work temperature: -40°C - +80°C
 housing's material: aluminium
 lens' material: plastic
 built-in connectors: Deutsch DT, AMP SuperSeal 1.5
 other: protection:
 • against overheating
 • against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to its influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).



Useful parts while installing:

deutsch plug DT06-2S 2-pin - cat. No. A.07135
AMP SuperSeal 1.5 plug 2-pin - cat. No. A.07137

Equivalents for Hella:

CRK2B.54200 - 1GA 011 720-041

DIMENSIONS

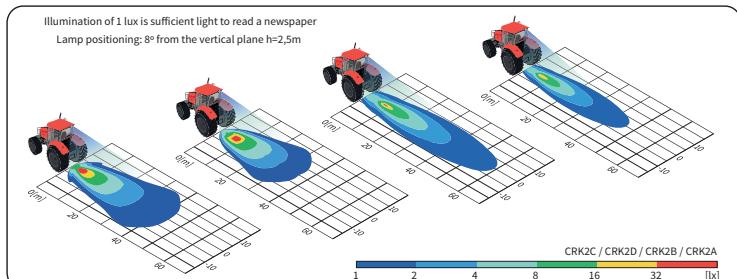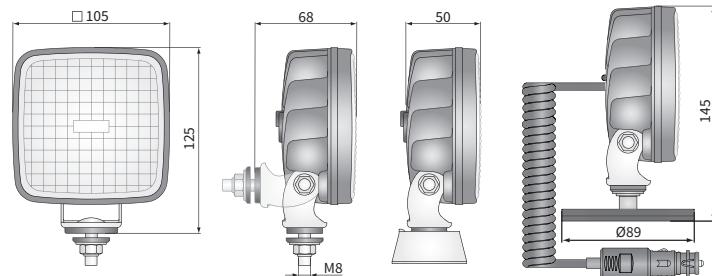

Cat. number	Luminous flux	Beam angle	Accessories	Connectors	Packaging / pc	Cat. number	Luminous flux	Beam angle	Accessories	Connectors	Packaging / pc
CRK2B.54200	✓ 1600 lm	✓ 28° x 28°	✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1	CRK2A.54110	✓ 1600 lm	✓ 28° x 28°	✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2B.54210	✓ 800 lm	✓ 50° x 30°	✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1	CRK2A.54130	✓ 800 lm	✓ 50° x 30°	✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2B.54230		housing	black white	cable 0.5 m	carton box	CRK2A.54150			cable 0.5 m	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2B.54206			✓ ✓ ✓ ✓ ✓ ✓	cable 8 m	blistер pack	CRK2A.54170			cable 8 m	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2B.54250				switch		CRK2B.54240	✓ 1600 lm	✓ 28° x 28°	✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2B.54270				cigarette lighter plug		CRK2B.54260	✓ 800 lm	✓ 50° x 30°	✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2C.54900			✓ ✓ ✓ ✓ ✓ ✓	Bracket		CRK2B.54280			✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2C.54910						CRK2C.54940			✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2C.54920			✓ ✓ ✓ ✓ ✓ ✓			CRK2C.54960	✓ 1600 lm	✓ 28° x 28°	✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2C.54930						CRK2C.54980	✓ 800 lm	✓ 50° x 30°	✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2C.54950						CRK2A.54140			✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2C.54970						CRK2A.54160			✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2D.55700						CRK2A.54180			✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2D.55750						CRK2B.54290	✓ 1600 lm	✓ 28° x 28°	✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2D.55770						CRK2C.54990	✓ 800 lm	✓ 50° x 30°	✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1
CRK2A.54100			✓ ✓ ✓ ✓ ✓ ✓			CRK2A.54190			✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓	1