## TECHNICAL DATA / FEATURES

dimensions:  $\phi$ 117x74 light function: driving

lamp function markings: HR maximum power: 29W

nominal voltage: 12V-24V DC

permissible power supply voltage: 10,5V-30V DC

reference mark: 12,5 source of light: 6 x LED

IP rating: IP67, IP69K, IP66 work temperature: -40°C - +80°C housing's material: aluminium/plastic

lens' material: glass

built-in connectors: AMP Faston 250, Deutsch DT,

AMP Superseal 1,5

other: protection:

against overheating

against reverse polarisation

bracket made of Inox steel



Stylish and robust lamps dedicated for cars.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

Equipped with removable protective grille.

It is possible to install needed connectors for a version with cable (on request).


Useful parts while installing: AMP Faston 250 plug 2-pin - cat. No. A.07138 AMP Superseal 1,5 plug 2-pin - cat. No. A.07137 deutsch plug DT06-2S 2-pin - cat. No. A.07135








## **DIMENSIONS**

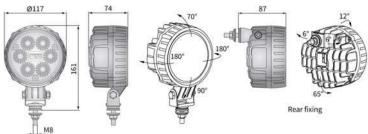





Cat. number	Homologation code	Light function	driving	Reference mark	12,5	IP rating	IP67	IP69K	IP66	Accessories	LED module 12V-24V	cable 0,5 m	Connectors	AMP Faston 250	AMP Superseal 1,5	Deutsch DT	Cap / Pin	Plug/Pin	Mounting	bracket	rear	Application	universal	dedicated	
CDC3.51800	085		✓		✓		✓	✓			✓	✓								✓			✓		
CDC3.51806	085		✓		✓			✓	✓		✓			✓			2			✓			✓		
CDC3.51807	085		✓		✓		✓	<b>√</b>			✓					✓	2			✓			✓		
CDC3.51808	085		✓		✓		✓	✓			<b>√</b>				✓		2			✓			✓		
CDC3.51820	085		✓		✓		✓	✓			✓	✓									✓		<b>√</b>		