



DSL-HLB25 SERIES

FRONT LED MULTIFUNCTIONAL HEAD LAMP



PRODUCT BENEFITS

- Two functions: High Beam, Low Beam and Optional Illuminated logo
- Ideal for various types of Vehicles and Applications
- Robust housing that can withstand challenging conditions
- High Emitted Light Performance
- Multivoltage 10-30V
- IP69 Protection



FUNCTIONS LAYOUT



TECHNICAL SPECIFICATIONS



DIMENSIONAL DRAWING

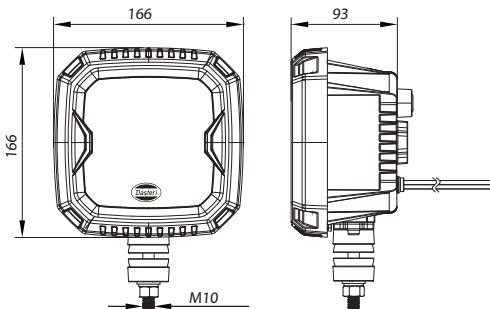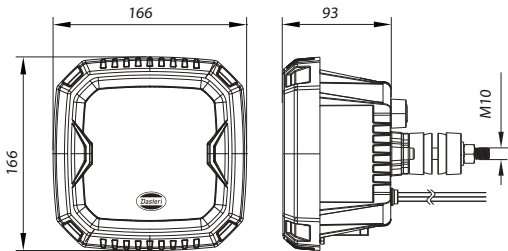



TECHNICAL SPECIFICATIONS

TECHNICAL DATA

Variants		DSL-HLB25		DSL-HLB25.01		
Operating Voltage		10 V - 30 V				
Reverse Polarity Protection		Yes				
Light Function		Low Beam	High Beam	Low Beam	High Beam	Logo
Consumption		16,1 W	17,3 W	16,1 W	17,3 W	1,2W / 2,2W
Temperature Range		- 40°C to + 65°C				
Material	Lens	PC (Clear)				
	Housing	ADC12 (Black)				
Type of Protection		IP69				
Approvals	ECE	Low Beam	High Beam	Low Beam	High Beam	-
		R149.00		R149.00		
		Class B		Class B		
	SAE	DOT		DOT		
	EMC	R10-06				
	CISPR 25	Class 3				
Type of Connection		450mm Cable Output 500mm with Deutsch Connector				

CODES OVERVIEW

Variants Ref. No.	Illuminated Logo	Cable Output	Deutsch Connector	Heated Lens
DSL-HLB25.C		•		
DSL-HLB25.01.C	•	•		
DSL-HLB25.D			•	
DSL-HLB25.01.D	•		•	
DSL-HLB25.CHT		•		•
DSL-HLB25.01.CHT	•	•		•
DSL-HLB25.DHT			•	•
DSL-HLB25.01.DHT	•		•	•

