

TECHNICAL DATA / FEATURES

- dimensions: $\phi 80 \times 102$, $\phi 84 \times 106$
- light function: daytime running
- lamp function markings: RL
- maximum power: 9W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10,5V-30V DC
- source of light: 3 x LED
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - $+80^{\circ}\text{C}$
- housing's material: aluminium/plastic
- lens' material: glass
- built-in connectors: AMP Faston 250, Deutsch DT
- other: protection:
 - against overheating
 - against reverse polarisation
- bracket made of Inox steel



ADDITIONAL INFORMATION

Practical, energy efficient lamps. Particularly recommended for trucks and cars.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: factory prepared places, built-in to vehicle's recess, as a freestanding on the body work. Versions with the bracket can be installed on a vehicle in an upright or upside-down position.


Useful parts while installing:

AMP Faston 250 plug 2-pin - cat. No. A.07138

AMP Superseal 1,5 plug 2-pin - cat. No. A.07137

deutsch plug DT06-2S 2-pin - cat. No. A.07135

DIMENSIONS

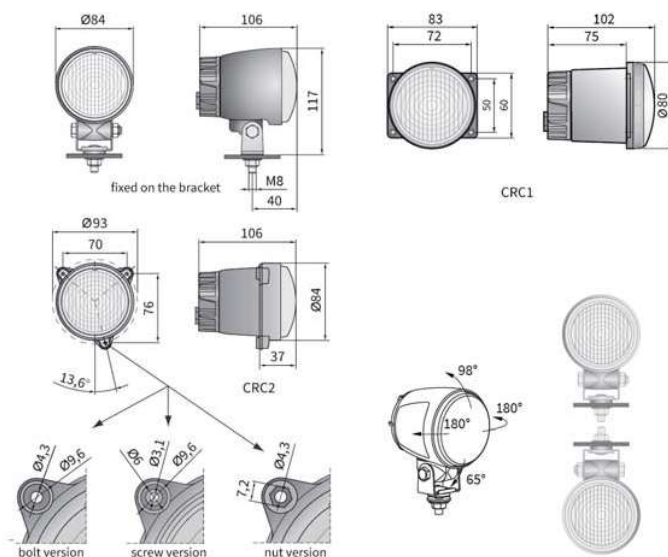

Cat. number	Homologation code	Diameter	$\phi 80$	$\phi 84$	IP rating	IP67	IP69K	IP66	Accessories	LED module 12V/24V	cable 0,15 m	cable 0,5 m	Connectors	AMP Faston 250	AMP Superseal 1,5	Deutsch DT	Mounting	bracket	spoiler / recess	Mounting method	Installed vertically up	bolts	nuts
CRC1.48101	080		✓			✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC1.48111	080		✓			✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC1.48121	080		✓			✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC1.48131	080		✓			✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48201	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48202	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48203	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48204	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48211	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48212	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
Cat. number	Homologation code	Diameter	$\phi 80$	$\phi 84$	IP rating	IP67	IP69K	IP66	Accessories	LED module 12V/24V	cable 0,15 m	cable 0,5 m	Connectors	AMP Faston 250	AMP Superseal 1,5	Deutsch DT	Mounting	bracket	spoiler / recess	Mounting method	Installed vertically up	bolts	nuts
CRC2.48213	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48214	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48221	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48222	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48223	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48224	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48231	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48232	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48233	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	
CRC2.48234	080			✓		✓	✓	✓		✓	✓	✓				✓		✓		✓	✓	✓	