



TECHNICAL DATA / FEATURES

| | |
|-----------------------------------|--|
| dimensions: | 68x68x70 |
| luminous flux of the LED module: | 800 lm |
| luminous flux of the lamp: | 600 lm |
| maximum power: | 12W |
| nominal voltage: | 12V-24V DC |
| permissible power supply voltage: | 10.5V-30V DC |
| source of light: | 2 x LED |
| colour temperature: | 4700-5700K |
| light distribution angle: | 43° x 34° |
| IP rating: | IP67, IP69K |
| work temperature: | -40°C - +80°C |
| housing's material: | aluminium |
| lens' material: | plastic |
| built-in connectors: | Deutsch DT, AMP SuperSeal 1.5 |
| other: | protection: <ul style="list-style-type: none"> • against overheating • against reverse polarisation bracket made of Inox steel |



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).



It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

DIMENSIONS

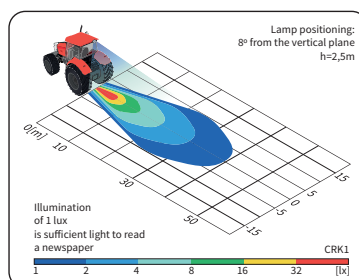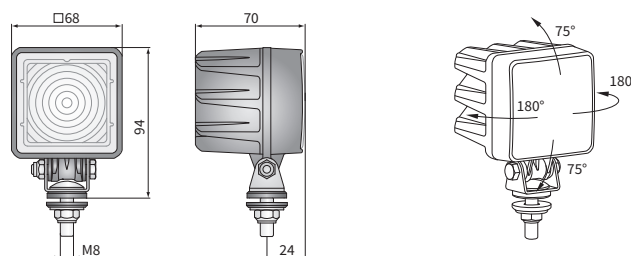

| Cat. number | Luminous flux | Rated power | IP rating | Accessories | LED module 12V/24V | LED module 48V | cable 0.5 m | cable 8 m | Bracket | neodymium magn. | Connectors | Deutsch DT | AMP SuperSeal 1,5 | Cap / Pin |
|--------------------|---------------|-------------|-----------|-------------|--------------------|----------------|-------------|-----------|---------|-----------------|------------|------------|-------------------|-----------|
| CRK1A.50700 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| CRK1A.50750 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 2 |
| CRK1A.50760 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 2 |