



DSL-W500L SERIES

LED BEACON LAMP




PRODUCT BENEFITS

- Designed for excellent Light Performance with more illuminated lens area
- Rotating and Flashing Light Patterns
- Available in Amber, Red, Blue, emitted light
- Two alternative Mounting Concepts (Flat, Magnetic)
- IP67 Protection
- Multi-voltage 10-30V



FUNCTIONS LAYOUT

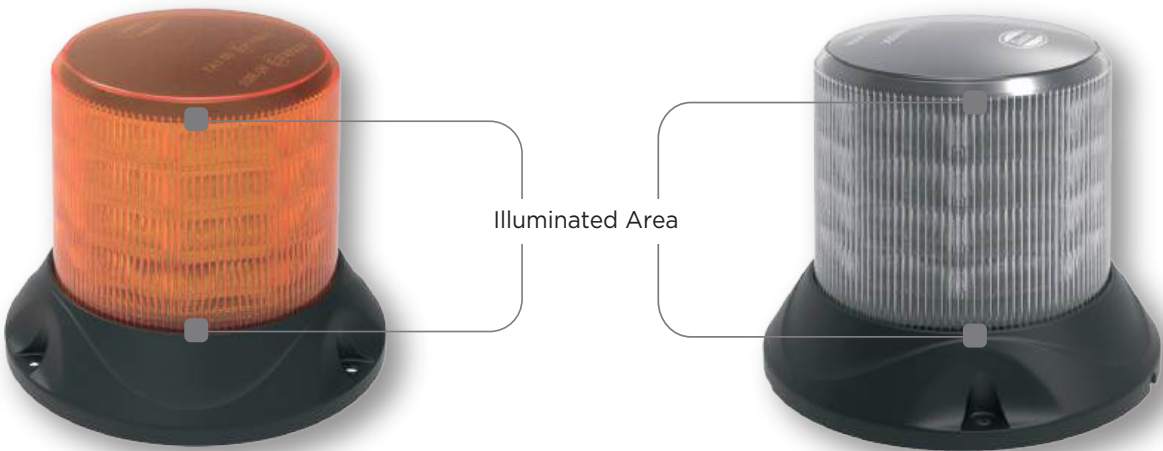


TECHNICAL SPECIFICATIONS

TECHNICAL DATA

Variants		Series DSL-W500L.05	Series DSL-W500L.06	Series DSL-W500L.08
Operating Voltage		10 V - 30 V		
Reverse Polarity Protection		Yes		
Light Function		LED Warning Light		
Emitted Color		Amber	Red	Blue
Consumption		27 W	18 W	24 W
Temperature Range		- 40°C to + 65°C		
Type of Mounting	Series DSL-W500L	Screw Mounting		
	Series DSL-W500LM	Magnetic Base		
Material	Lens	PC (Amber)	PC (Transparent)	PC (Transparent)
	Housing	PC		
Type of Protection		IP67		
Approvals	ECE	R65	R65	R65
		TA1	TR1	TB1
		00	00	00
	SAE	J845 - Class 1		
	EMC	R10-06		
	CISPR 25	Class 3		
Flashing Patterns		10		
Type of Connection	Series DSL-W500L	500mm Cable		
	Series DSL-W500LM	2500mm Cable + Cigarette Plug		

DIMENSIONAL DRAWING

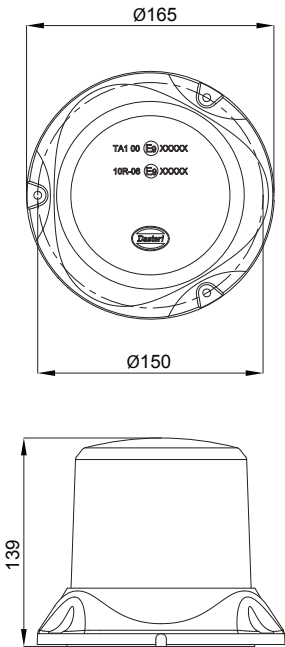

CODES OVERVIEW

Variants Ref. No.	Screw Mounting	Magnetic Mounting	Amber	Red	Blue
DSL-W500L.05	•		•		
DSL-W500L.06	•			•	
DSL-W500L.08	•				•
DSL-W500LM.05		•	•		
DSL-W500LM.06		•		•	
DSL-W500LM.08		•			•