



dimensions: $\phi 220 \times 87$
 light functions: driving, parking
 function markings: HR, A
 maximum power: 27W, 3W
 nominal voltage: 12V-24V DC
 power supply voltage: 10.5V-30V DC
 reference mark: 50, 25
 source of light: 6 x LED
 IP rating: IP67, IP69K
 work temperature: $-40^{\circ}\text{C} - +80^{\circ}\text{C}$
 housing's material: aluminium
 housing's colour: black, white, chrome-plated
 lens' material: glass
 built-in connectors: -
 other: protection:


- against overheating
- against reverse polarisation

 screws made of Inox steel



DIMENSIONS

It is possible to install needed connectors on wire (on request).

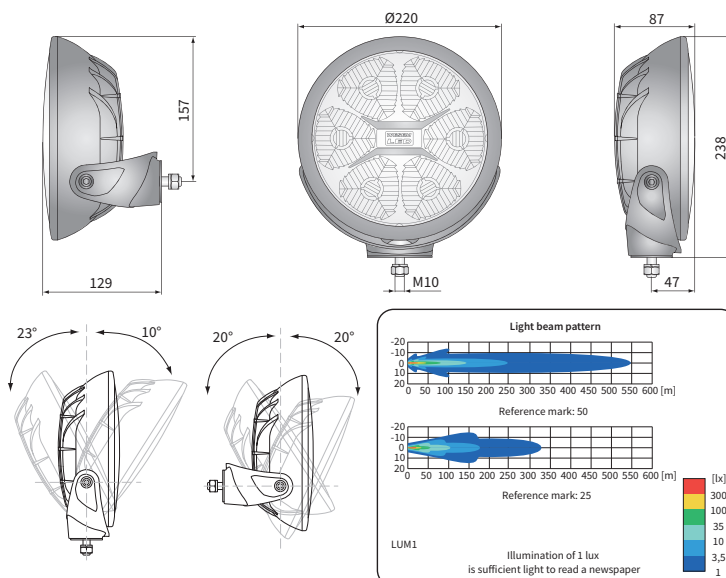

Cat. number	Hella Catal. No.	Homologation code
LUM1.50800	1F8 011 002-001	084
LUM1.50804	1F8 011 002-001	084
LUM1.50880		084
LUM1.50805	1F8 011 002-001	084
LUM1.50806	1F8 011 002-001	084
LUM1.50815		084
LUM1.50810		084
LUM1.50850		087
LUM1.50853		087
LUM1.50854		087
LUM1.50855		087
LUM1.50860		087