



TECHNICAL DATA / FEATURES

- dimensions: 103x103x38
- luminous flux of the LED module: 1600 lm
- luminous flux of the lamp: 1300 lm
- maximum power: 22W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 12 x LED
- colour temperature: 4000-6000K
- light distribution angle: 50° x 30°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: plastic
- lens' material: plastic
- built-in connectors: Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.


Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:
Deutsch plug DT06-2S 2-pin - cat. No. A.07135
AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

DIMENSIONS

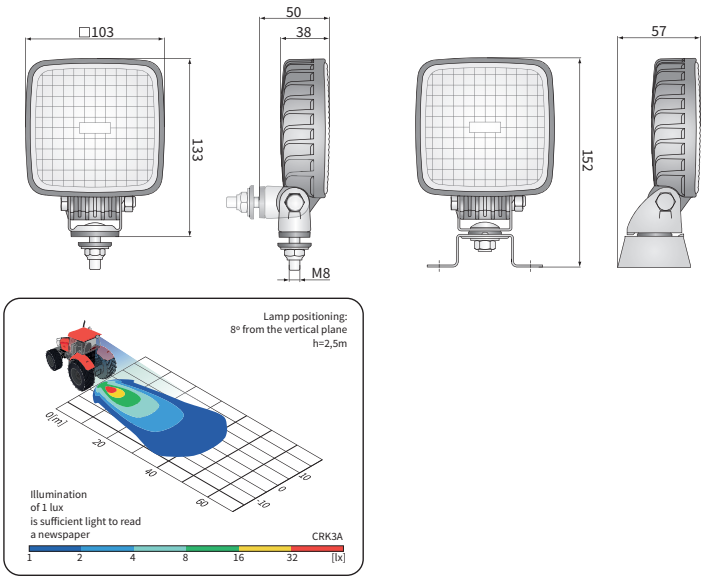

Cat. number	Luminous flux		Beam angle	Housing material	Accessories	LED module 12V-24V	cable 0.5 m	SuperSeal 2S Plug	Bracket	M8	omega	Connectors	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin	Packaging / pc	carton box
	1600 lm	800 lm															
CRK3A.60300	✓		✓	✓	✓	✓	✓		✓								1
CRK3A.60350	✓		✓	✓	✓	✓			✓			✓			2		1
CRK3A.60370	✓		✓	✓	✓	✓			✓				✓		2		1
CRK3A.60372	✓		✓	✓	✓	✓		✓	✓				✓		2		1