



TECHNICAL DATA / FEATURES

dimensions:	Ø180x69
light functions:	driving, parking
function markings:	HR, A
maximum power:	27W, 3W
nominal voltage:	12V-24V DC
permissible power supply voltage:	10.5V-30V DC
reference mark:	25
source of light:	6 x LED
IP rating:	IP67, IP69K
work temperature:	-40°C - +80°C
housing's material:	aluminium
lens' material:	glass
built-in connectors:	-
other:	protection: <ul style="list-style-type: none"> against overheating against reverse polarisation screws made of Inox steel



ADDITIONAL INFORMATION

Stylish and robust lamps dedicated for trucks.

LED technology used in driving and position light guarantees the highest efficiency.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to its influence. Correct polarity required.

Mounting: as a freestanding or on vertical body work panels.


It is possible to install needed connectors on wire (on request).

Equivalents for Hella:

LUM2.51200 - 1F3 011 815-001

LUM2.51210 - 1F3 011 815-011

DIMENSIONS

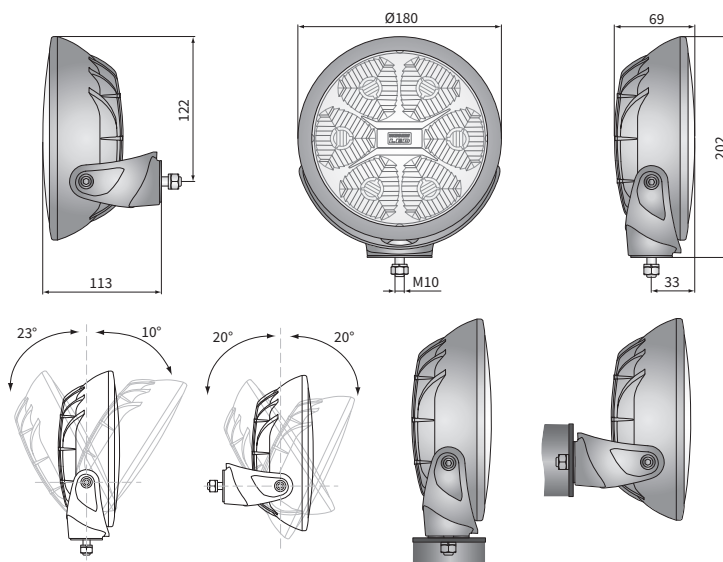

Cat. number	Homologation code	Light functions	driving	parking	Reference mark	25	IP rating	IP67	IP69K	Accessories	LED module 12V-24V	light cover	chrome-plated frame	black frame	cable 0.5 m	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1.5
LUM2.51200	086	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUM2.51210	086	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

