

# CRC5 built-in LED work lamps

## TECHNICAL DATA / FEATURES

dimensions:  $\phi 87 \times 72$   
 luminous flux of the LED module: 1500 lm, 1000 lm  
 luminous flux of the lamp: 1200 lm, 800 lm  
 maximum power: 18W, 14.5W  
 nominal voltage: 12V-24V DC  
 permissible power supply voltage: 10.5V-30V DC  
 source of light: 4 x LED  
 colour temperature: 5700-7000K  
 light distribution angle: 58°  
 IP rating: IP67, IP69K  
 work temperature: -40°C - +80°C  
 housing's material: aluminium/plastic  
 lens' material: plastic  
 built-in connectors: Deutsch DT, AMP SuperSeal 1.5  
 other: protection:

- against overheating
- against reverse polarisation



## ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to its influence.

Correct polarity required.



Mounting: factory prepared places, built-in to vehicle's recess.

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

deutsch plug DT06-2S 2-pin - cat. No. A.07135  
 AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

## DIMENSIONS

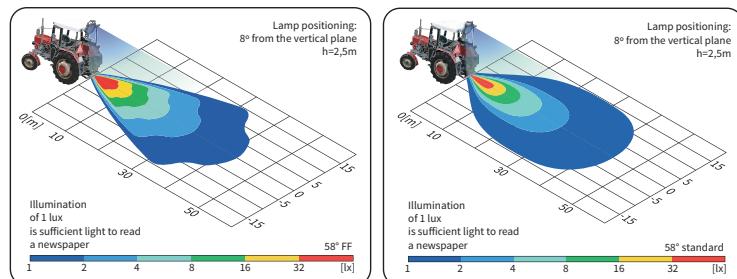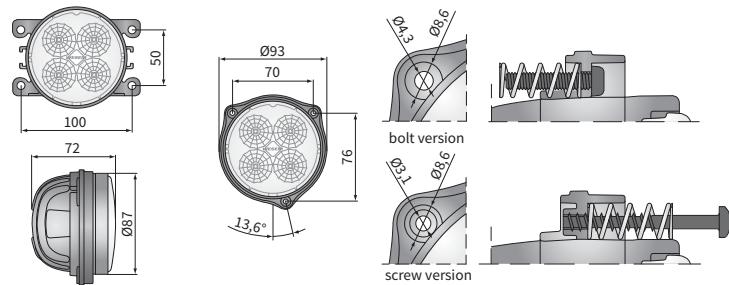

Cat. number	Luminous flux	Optics	IP rating	Accessories	Bracket	Connectors	Cat. number	Luminous flux	Optics	IP rating	Accessories	Bracket	Connectors
<b>CRC5D.51620</b>	2000 lm	✓	IP67	✓	✓	Deutsch DT	<b>CRC5C.51520</b>	2000 lm	✓	IP67	✓	✓	Deutsch DT
CRC5D.51622	1500 lm	✓	IP69K	✓	✓	AMP SuperSeal 1,5	<b>CRC5C.51522</b>	1500 lm	✓	IP67	✓	✓	AMP SuperSeal 1,5
<b>CRC5D.51621</b>	1000 lm	FF	IP69K	✓	✓		<b>CRC5C.51521</b>	1000 lm	FF	IP67	✓	✓	AMP SuperSeal 1,5
<b>CRC5D.51623</b>	1000 lm	FF	IP69K	✓	✓		<b>CRC5C.51523</b>	1000 lm	FF	IP67	✓	✓	AMP SuperSeal 1,5
CRC5D.51624	✓	✓	IP67	✓	✓		<b>CRC5C.51524</b>	✓	✓	IP67	✓	✓	AMP SuperSeal 1,5
CRC5D.51625	✓	✓	IP69K	✓	✓		<b>CRC5C.51525</b>	✓	✓	IP67	✓	✓	AMP SuperSeal 1,5
CRC5D.51626	✓	✓	IP67	✓	✓		<b>CRC5C.51526</b>	✓	✓	IP67	✓	✓	AMP SuperSeal 1,5
<b>CRC5D.51627</b>	✓	✓	IP69K	✓	✓		<b>CRC5C.51527</b>	✓	✓	IP67	✓	✓	AMP SuperSeal 1,5
CRC5D.51628	✓	✓	IP67	✓	✓		<b>CRC5C.51528</b>	✓	✓	IP67	✓	✓	AMP SuperSeal 1,5
<b>CRC5F.52020</b>	✓	✓	IP67	✓	✓		<b>CRC5E.51920</b>	✓	✓	IP67	✓	✓	AMP SuperSeal 1,5
CRC5F.52022	✓	✓	IP67	✓	✓		<b>CRC5E.51922</b>	✓	✓	IP67	✓	✓	AMP SuperSeal 1,5
CRC5F.52021	✓	✓	IP69K	✓	✓		<b>CRC5E.51921</b>	✓	✓	IP67	✓	✓	AMP SuperSeal 1,5
<b>CRC5F.52023</b>	✓	✓	IP69K	✓	✓		<b>CRC5E.51923</b>	✓	✓	IP67	✓	✓	AMP SuperSeal 1,5
CRC5F.52024	✓	✓	IP67	✓	✓		<b>CRC5E.51924</b>	✓	✓	IP67	✓	✓	AMP SuperSeal 1,5
CRC5F.52025	✓	✓	IP67	✓	✓		<b>CRC5E.51925</b>	✓	✓	IP67	✓	✓	AMP SuperSeal 1,5
<b>CRC5F.52026</b>	✓	✓	IP67	✓	✓		<b>CRC5E.51926</b>	✓	✓	IP67	✓	✓	AMP SuperSeal 1,5
<b>CRC5F.52027</b>	✓	✓	IP67	✓	✓		<b>CRC5E.51927</b>	✓	✓	IP67	✓	✓	AMP SuperSeal 1,5
CRC5F.52028	✓	✓	IP67	✓	✓		<b>CRC5E.51928</b>	✓	✓	IP67	✓	✓	AMP SuperSeal 1,5