



TECHNICAL DATA / FEATURES

dimensions:	176x87x86
luminous flux of the LED module:	5500 lm, 4000 lm, 3000 lm, 2200 lm
luminous flux of the lamp:	4400 lm, 3200 lm, 2400 lm, 1800 lm
maximum power:	70W, 40W, 35W, 28W
nominal voltage:	12V-24V DC
permissible power supply voltage:	10.5V-30V DC
source of light:	10 x LED
colour temperature:	5700-7000K
light distribution angle:	60°
IP rating:	IP67, IP69K, IP66
work temperature:	-40°C - +80°C
housing's material:	aluminium
lens' material:	plastic
built-in connectors:	Deutsch DT, AMP Faston 250, AMP SuperSeal 1.5
other:	protection:
	• against overheating
	• against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in an upright or upside down position.

The bracket parts are made of Inox steel.

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

AMP Faston 250 plug 2-pin - cat. No. A.07138

Replacement parts:



brackets - cat. No. CAR1.47300

Equivalents for Hella:

CRV1A.49514 - 1GB 996 386-001

CRV1A.49502 - 1GB 996 386-031

DIMENSIONS

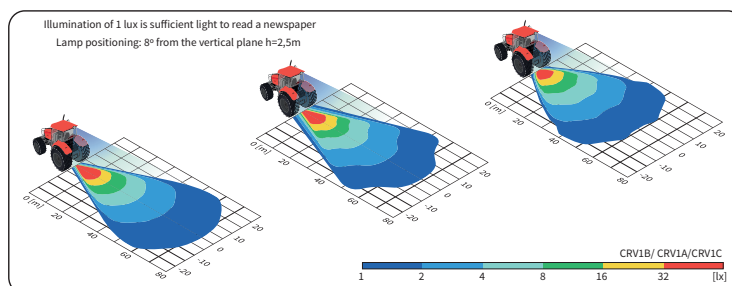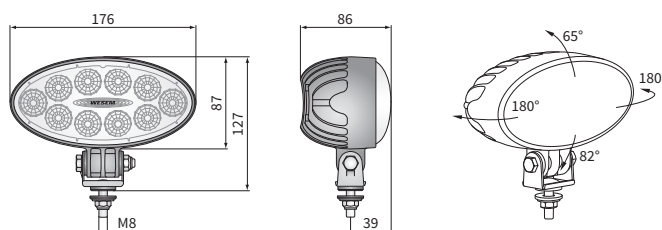

Cat. number	Luminous flux	5500 lm	4000 lm	3000 lm	2200 lm	IP rating	IP66	IP67	IP69K	Accessories	LED module 12V-24V	cable 0.15 m	cable 0.22 m	cable 0.5 m	cable 8 m	switch	Bracket	M8	omega	CAR1	CAR3	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5
CRV1D.55901	✓																								
CRV1D.55914	✓																								
CRV1B.52301		✓																							
CRV1B.52306		✓					✓																		
CRV1B.52304		✓																							
CRV1B.52302		✓																							
CRV1B.52303		✓																							
CRV1B.52340		✓																							
CRV1A.49501			✓																						
CRV1A.49541			✓																						
CRV1A.49506				✓			✓																		
CRV1A.49514				✓																					
CRV1A.49502			✓																						
CRV1A.49513			✓																						

Cat. number	Luminous flux	5500 lm	4000 lm	3000 lm	2200 lm	IP rating	IP66	IP67	IP69K	Accessories	LED module 12V-24V	cable 0.15 m	cable 0.22 m	cable 0.5 m	cable 8 m	switch	Bracket	M8	omega	CAR1	CAR3	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5
CRV1A.49521																									
CRV1A.49526							✓																		
CRV1A.49522																									
CRV1A.49534																									
CRV1A.49542																									
CRV1A.49533																									
CRV1A.49540																									
CRV1C.52701																									
CRV1C.52706							✓																		
CRV1C.52714																									
CRV1C.52713																									
CRV1C.52721																									
CRV1C.52726																									
CRV1C.52734																									
CRV1C.52733																									