




TECHNICAL DATA / FEATURES

- dimensions: 100x100x76
- luminous flux of the LED module: 2000 lm, 1500 lm
- luminous flux of the lamp: 1600 lm, 1200 lm
- maximum power: 25W, 19W
- nominal voltage: 12V-24V DC, 48V DC
- permissible power supply voltage: 10.5V-30V DC, 40-60V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 6°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

DIMENSIONS

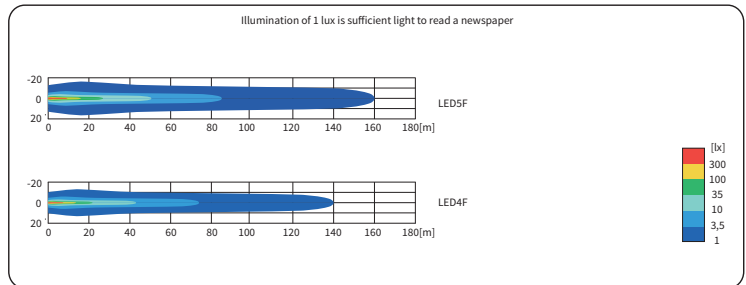

Cat. number	Luminous flux				IP rating	Accessories	Connectors			
	3000 lm	2500 lm	2000 lm	1500 lm			AMP Faston 250	Deutsch DT	AMP SuperSeal 1.5	Cap / Pin
LED5F.47900										
LED5F.47980			✓							
LED5F.47906			✓		✓					2
LED5F.47907			✓				✓			2
LED5F.47908			✓					✓		2
LED5F.47910			✓							
LED5F.47916			✓		✓		✓			2
LED5F.47917			✓					✓		2
LED5F.47918			✓						✓	2
LED4F.47800			✓							
LED4F.47801			✓							
LED4F.47880			✓							
LED4F.47806			✓		✓		✓			2
LED4F.47807			✓					✓		2
LED4F.47808			✓						✓	2
LED4F.47810			✓							
LED4F.47816			✓		✓		✓			2
LED4F.47817			✓					✓		2
LED4F.47818			✓						✓	2
LED4F.47840			✓							
LED4F.47884			✓							
LED4F.47846			✓		✓		✓			2
LED4F.47847			✓					✓		2
LED4F.47848			✓						✓	2
LED4F.47850			✓							
LED4F.47856			✓		✓		✓			2
LED4F.47857			✓					✓		2