



## TECHNICAL DATA / FEATURES

- dimensions: 120x104x81
- luminous flux of the LED module: 1500 lm
- luminous flux of the lamp: 1200 lm
- maximum power: 18W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10,5V-30V DC
- source of light: 4 x LED
- colour temperature: 5700-7000K
- light distribution angle: 60°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP Superseal 1,5
- other: protection:
  - against overheating
  - against reverse polarisation



## ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They shall be installed on a vehicle in horizontal position, as left-side or right-side mounted.

The bracket parts are made of Inox steel.



Different colours of the frame are available: i.e. red, yellow (option).

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP Superseal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138

## DIMENSIONS

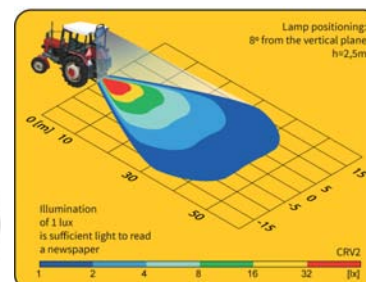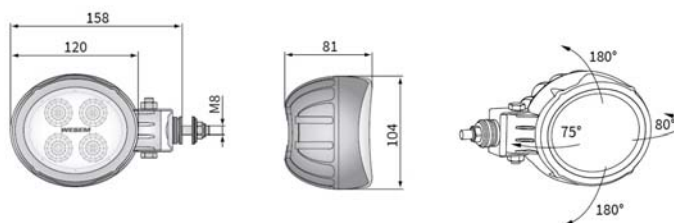

Cat. number	Luminous flux			IP rating			Accessories												
	2000 lm	1500 lm	1000 lm	IP67	IP69K	IP66	LED module 12V-24V handle	cable 0,5 m	cable 8 m	omega bracket	switch	cigarette lighter plug	ferrite magn. holder	neodymium magn. holder	Connectors	AMP Faston 250	AMP Superseal 1,5	Deutsch DT	Cap / Pin
<b>CRV2A.49640</b>		✓		✓	✓		✓												
CRV2A.49641		✓		✓	✓		✓	✓			✓								
CRV2A.49646		✓		✓	✓	✓	✓								✓				2
<b>CRV2A.49647</b>		✓		✓	✓		✓										✓		2
<b>CRV2A.49649</b>		✓		✓	✓		✓								✓				2