

# CRC5 built-in LED work lamps

## TECHNICAL DATA / FEATURES

dimensions:  $\phi 87 \times 72$   
 luminous flux of the LED module: 1500 lm, 1000 lm  
 luminous flux of the lamp: 1200 lm, 800 lm  
 maximum power: 18W, 14.5W  
 nominal voltage: 12V-24V DC  
 permissible power supply voltage: 10.5V-30V DC  
 source of light: 4 x LED  
 colour temperature: 5700-7000K  
 light distribution angle: 58°  
 IP rating: IP67, IP69K  
 work temperature: -40°C - +80°C  
 housing's material: aluminium/plastic  
 lens' material: plastic  
 built-in connectors: Deutsch DT, AMP SuperSeal 1.5  
 other: protection:  
 • against overheating  
 • against reverse polarisation



## ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to its influence.

Correct polarity required.



Mounting: factory prepared places, built-in to vehicle's recess.

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

deutsch plug DT06-2S 2-pin - cat. No. A.07135  
 AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

## DIMENSIONS

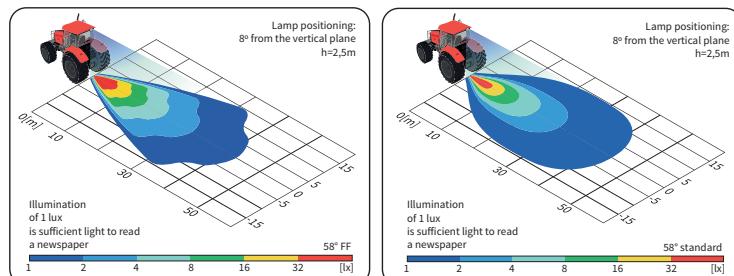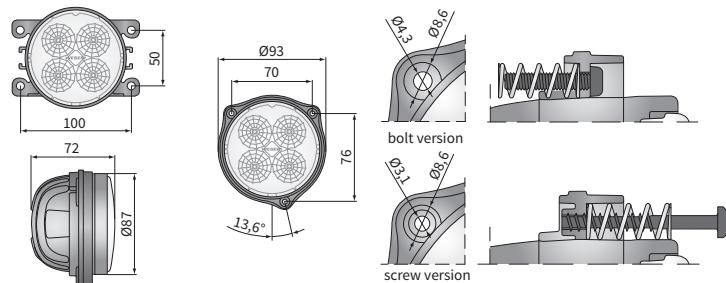

Cat. number	Luminous flux										Optics	IP rating	Accessories	cable 0,5 m	Bracket	Connectors	Deutsch DT AMP SuperSeal 1,5	Cat. number	Luminous flux											
	2000 lm	1500 lm	1000 lm	FF	Standard	✓	✓	✓	✓	✓									✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
<b>CRC5D.51620</b>																														
CRC5D.51622																														
<b>CRC5D.51621</b>																														
<b>CRC5D.51623</b>																														
CRC5D.51624																														
CRC5D.51625																														
CRC5D.51626																														
<b>CRC5D.51627</b>																														
CRC5D.51628																														
<b>CRC5F.52020</b>																														
CRC5F.52022																														
CRC5F.52021																														
<b>CRC5F.52023</b>																														
CRC5F.52024																														
CRC5F.52025																														
CRC5F.52026																														
<b>CRC5F.52027</b>																														
CRC5F.52028																														
<b>CRC5C.51520</b>																														
CRC5C.51522																														
<b>CRC5C.51521</b>																														
<b>CRC5C.51523</b>																														
CRC5C.51524																														
CRC5C.51525																														
CRC5C.51526																														
<b>CRC5C.51527</b>																														
CRC5C.51528																														
<b>CRC5E.51920</b>																														
CRC5E.51922																														
<b>CRC5E.51921</b>																														
<b>CRC5E.51923</b>																														
CRC5E.51924																														
CRC5E.51925																														
CRC5E.51926																														
<b>CRC5E.51927</b>																														
CRC5E.51928																														