



TECHNICAL DATA / FEATURES

- dimensions: $\phi 87 \times 72$
- luminous flux of the LED module: 1500 lm, 1000 lm
- luminous flux of the lamp: 1200 lm, 800 lm
- maximum power: 18W, 14.5W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 4 x LED
- colour temperature: 5700-7000K
- light distribution angle: 58°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: factory prepared places, built-in to vehicle's recess.




It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

DIMENSIONS

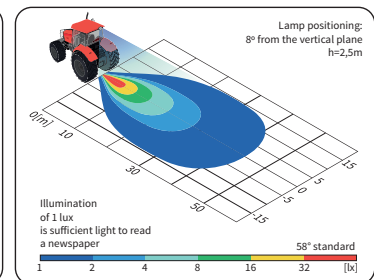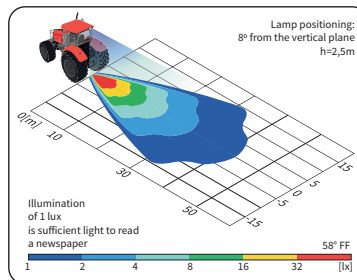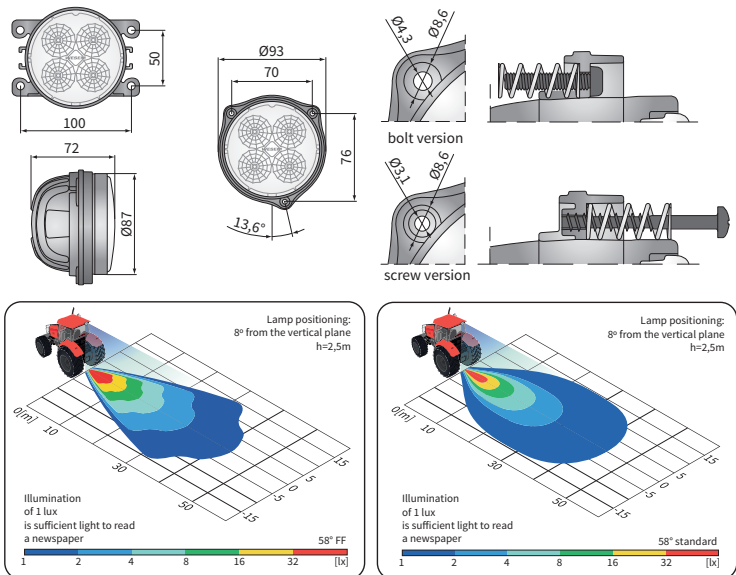

Cat. number	Luminous flux			Optics	FF	standard	IP rating	IP67	IP69K	Accessories	cable 0.5 m	cable 0.15 m	Bracket	3 screws	3 bolts	4 bolts	Connectors	Deutsch DT	AMP SuperSeal 1,5
	2000 lm	1500 lm	1000 lm																
CRC5D.51620		✓						✓	✓					✓					
CRC5D.51622		✓						✓	✓										
CRC5D.51621		✓						✓	✓										
CRC5D.51623		✓						✓	✓										
CRC5D.51624		✓						✓	✓										
CRC5D.51625		✓						✓	✓			✓							
CRC5D.51626		✓						✓	✓			✓							
CRC5D.51627		✓						✓	✓										
CRC5D.51628		✓						✓	✓										
CRC5F.52020		✓						✓	✓		✓								
CRC5F.52022		✓						✓	✓										
CRC5F.52021		✓						✓	✓										
CRC5F.52023		✓						✓	✓										
CRC5F.52024		✓						✓	✓										
CRC5F.52025		✓						✓	✓										
CRC5F.52026		✓						✓	✓			✓							
CRC5F.52027		✓						✓	✓										
CRC5F.52028		✓						✓	✓										
CRC5C.51520																			
CRC5C.51522																			
CRC5C.51521																			
CRC5C.51523																			
CRC5C.51524																			
CRC5C.51525																			
CRC5C.51526																			
CRC5C.51527																			
CRC5C.51528																			
CRC5E.51920																			
CRC5E.51922																			
CRC5E.51921																			
CRC5E.51923																			
CRC5E.51924																			
CRC5E.51925																			
CRC5E.51926																			
CRC5E.51927																			
CRC5E.51928																			