



## TECHNICAL DATA / FEATURES

- dimensions: 100x100x76
- luminous flux of the LED module: 3000 lm, 2500 lm, 2000 lm, 1500 lm
- luminous flux of the lamp: 2400 lm, 2000 lm, 1600 lm, 1200 lm
- maximum power: 30W, 29W, 25W, 19W
- nominal voltage: 12V-24V DC, 48V DC
- permissible power supply voltage: 10.5V-30V DC, 40-60V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 66° x 20°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP Faston 250
- other: protection:
  - against overheating
  - against reverse polarisation
- bracket made of Inox steel



## ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.



The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Replacement parts:

neodymium magnet  $\phi 89/500N$  (1 pc.) - cat. No. CAR4.51320

## DIMENSIONS

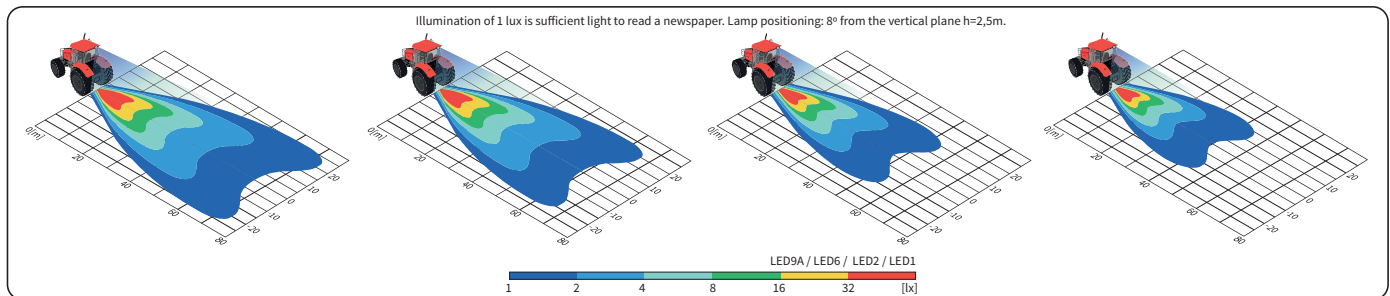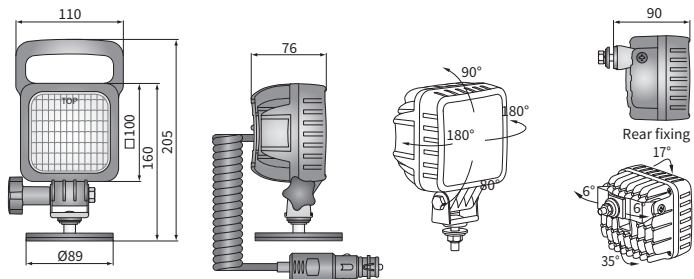

Cat. number	Luminous flux				IP rating	IP rating		Accessories	LED module 12V-24V				LED module 48V				Mounting method	installed vertically up			Bracket	Connectors		
	3000 lm	2500 lm	2000 lm	1500 lm		IP67	IP69K		LED module	handle	cable 0,22 m	cable 0,5 m	cable 8 m	switch	cigarette lighter plug	any		rear	neodymium magn.	CAR1		M8	AMP Faston 250	Deutsch DT
<b>LED9A.53795</b>	✓				✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
<b>LED9A.53796</b>	✓				✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
<b>LED6.49895</b>		✓			✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
<b>LED6.49896</b>		✓			✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
<b>LED6.49897</b>		✓			✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
LED6.49825		✓			✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
<b>LED2.47595</b>			✓		✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
<b>LED2.47596</b>			✓		✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
LED2.47597			✓		✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
LED2.47525			✓		✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
<b>LED1.46831</b>				✓	✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
<b>LED1.46832</b>				✓	✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
LED1.46833				✓	✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
LED1.46818				✓	✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
LED1.46825				✓	✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
<b>LED1.46834</b>				✓	✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
<b>LED1.46835</b>				✓	✓	✓	✓	✓	✓					✓	✓	✓	✓	✓						
																							2	