



TECHNICAL DATA / FEATURES

- dimensions: $\phi 84 \times 97$
- source of light: H3
- maximum power: 70W
- nominal voltage: 12V-24V DC
- optics: FF
- light distribution angle: $40^\circ \times 22^\circ$
- IP rating: IP66, IP69K
- housing's material: plastic
- housing's colour: black
- lens' material: glass
- built-in connectors: AMP Faston 250, Deutsch DT



ADDITIONAL INFORMATION

Universal lamps dedicated for small recesses or in places with limited space for installation.

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.


Versions with the bracket can be installed on a vehicle in an upright or upside-down position.

It is possible to install needed connectors on wire (on request).

Useful parts while installing:

- AMP Faston 250 plug 2-pin - cat. No. A.07138
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- deutsch plug DT06-2S 2-pin - cat. No. A.07135

DIMENSIONS

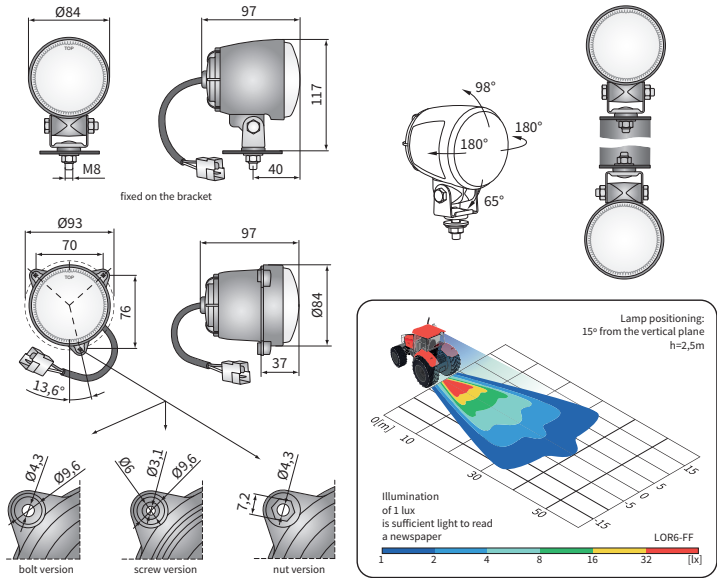

Cat. number	Hella Catal. No.	Cobo Catal. No.	IP rating		Accessories	Mounting method	in recess	installed vertically up	suspended	Bracket			Connectors			Packaging / pc	carton box
			IP66	IP69K						M8	3 bolts	3 screws	3 nuts	AMP Faston 250	Deutsch DT		
LOR6.41557	1G0 996 176-111	05.1190.0000	✓	✓				✓	✓	✓	✓	✓	✓	✓	2	1	
LOR6.41558			✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	2	1	
LOR6.41551	1G0 996 176-001		✓	✓				✓	✓	✓	✓	✓	✓	✓	2	1	
LOR6.41552			✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	2	1	
LOR6.41584			✓	✓				✓	✓	✓	✓	✓	✓	✓	2	1	
LOR6.41553			✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	2	1	
LOR6.41556			✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	2	1	
LOR6.41571	1G0 996 176-021		✓	✓			✓			✓	✓	✓	✓	✓	2	1	
LOR6.41572			✓	✓		✓	✓			✓	✓	✓	✓	✓	2	1	
LOR6.41561	1G0 996 176-021		✓	✓						✓	✓	✓	✓	✓	2	1	
LOR6.41562			✓	✓		✓	✓			✓	✓	✓	✓	✓	2	1	
LOR6.41567			✓	✓		✓	✓			✓	✓	✓	✓	✓	2	1	
LOR6.41586			✓	✓		✓	✓			✓	✓	✓	✓	✓	2	1	
LOR6.41585			✓	✓		✓	✓			✓	✓	✓	✓	✓	2	1	
LOR6.41542			✓	✓		✓	✓			✓	✓	✓	✓	✓	2	1	
LOR6.41564			✓	✓		✓	✓			✓	✓	✓	✓	✓	2	1	
LOR6.41576			✓	✓		✓	✓			✓	✓	✓	✓	✓	2	1	