

TECHNICAL DATA / FEATURES

dimensions:	ø80x102, ø84x106
light function:	daytime running
lamp function markings:	RL
maximum power:	9W
nominal voltage:	12V-24V DC
permissible power supply voltage:	10,5V-30V DC
source of light:	3 x LED
IP rating:	IP67, IP69K, IP66
work temperature:	-40°C - +80°C
housing's material:	aluminium/plastic
lens' material:	glass
built-in connectors:	AMP Faston 250, Deutsch DT
other:	protection:
	• against overheating
	• against reverse polarisation
	bracket made of Inox steel



ADDITIONAL INFORMATION

Practical, energy efficient lamps. Particularly recommended for trucks and cars.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: factory prepared places, built-in to vehicle's recess, as a freestanding on the body work. Versions with the bracket can be installed on a vehicle in an upright or upside-down position.


Useful parts while installing:

AMP Faston 250 plug 2-pin - cat. No. A.07138

AMP Superseal 1,5 plug 2-pin - cat. No. A.07137

deutsch plug DT06-2S 2-pin - cat. No. A.07135

DIMENSIONS

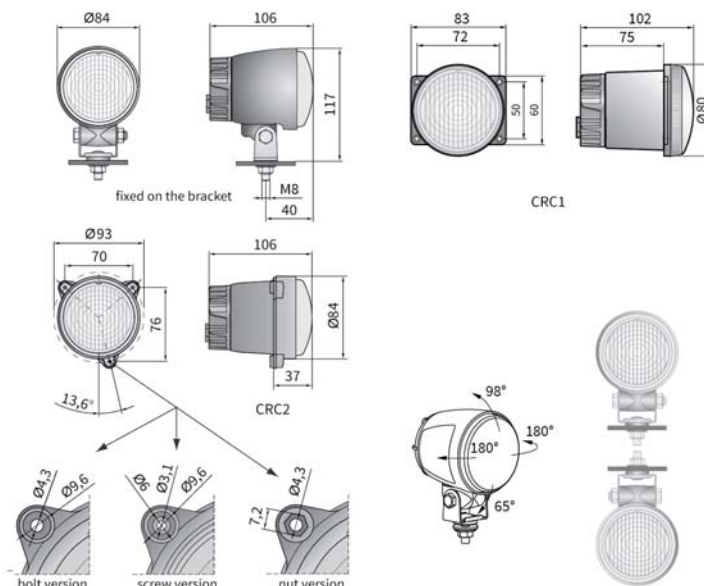

Cat. number	Homologation code	Diameter	ø80	ø84	IP rating	IP67	IP69K	IP66	Accessories	LED module 12V-24V	cable 0,15 m	cable 0,5 m	Connectors	AMP Faston 250	AMP Superseal 1,5	Deutsch DT	Mounting	bracket	spoiler / recess	Mounting method	installed vertically up	bolts	nuts
CRC1.48101	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC1.48111	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC1.48121	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC1.48131	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48201	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48202	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48203	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48204	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48211	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48212	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Cat. number	Homologation code	Diameter	ø80	ø84	IP rating	IP67	IP69K	IP66	Accessories	LED module 12V-24V	cable 0,15 m	cable 0,5 m	Connectors	AMP Faston 250	AMP Superseal 1,5	Deutsch DT	Mounting	bracket	spoiler / recess	Mounting method	installed vertically up	bolts	nuts
CRC2.48213	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48214	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48221	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48222	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48223	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48224	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48231	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48232	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48233	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC2.48234	080	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓