




## TECHNICAL DATA / FEATURES

- dimensions: 100x100x76
- luminous flux of the LED module: 2000 lm, 1500 lm
- luminous flux of the lamp: 1600 lm, 1200 lm
- maximum power: 25W, 19W
- nominal voltage: 12V-24V DC, 48V DC
- permissible power supply voltage: 10.5V-30V DC, 40-60V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 6°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
  - against overheating
  - against reverse polarisation



## ADDITIONAL INFORMATION

## DIMENSIONS

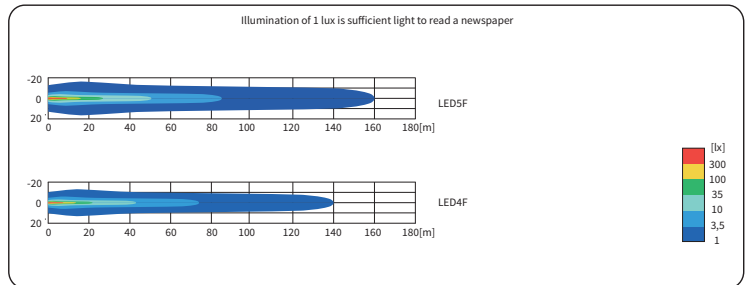

Cat. number	Luminous flux				IP rating	Accessories	Connectors						
	3000 lm	2500 lm	2000 lm	1500 lm			AMP Faston 250	Deutsch DT	AMP SuperSeal 1.5	Cap / Pin			
<b>LED5F.47900</b>			✓		IP66	LED module 12V-24V							
LED5F.47980			✓		IP67	LED module 48V							
<b>LED5F.47906</b>			✓		IP69K	handle				✓		2	
<b>LED5F.47907</b>			✓			cable 0.5 m					✓	2	
<b>LED5F.47908</b>			✓			cable 1 m						2	
<b>LED5F.47910</b>			✓			switch							
LED5F.47916			✓							✓		2	
<b>LED5F.47917</b>			✓								✓	2	
<b>LED5F.47918</b>			✓									2	
<b>LED4F.47800</b>			✓										2
LED4F.47801			✓										
<b>LED4F.47880</b>			✓										✓
<b>LED4F.47806</b>			✓							✓		2	
<b>LED4F.47807</b>			✓								✓	2	
<b>LED4F.47808</b>			✓									2	
<b>LED4F.47810</b>			✓										
LED4F.47816			✓							✓		2	
<b>LED4F.47817</b>			✓								✓	2	
<b>LED4F.47818</b>			✓									2	
<b>LED4F.47840</b>			✓										2
LED4F.47884			✓										
LED4F.47846			✓							✓		2	
<b>LED4F.47847</b>			✓								✓	2	
<b>LED4F.47848</b>			✓									2	
<b>LED4F.47850</b>			✓										2
LED4F.47856			✓							✓		2	
<b>LED4F.47857</b>			✓								✓	2	