



TECHNICAL DATA / FEATURES

- dimensions: 100x100x76
- luminous flux of the LED module: 3000 lm, 2500 lm
- luminous flux of the lamp: 2400 lm, 2000 lm
- maximum power: 30W, 29W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 66° x 20°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).



The bracket parts are made of Inox steel.

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138

DIMENSIONS

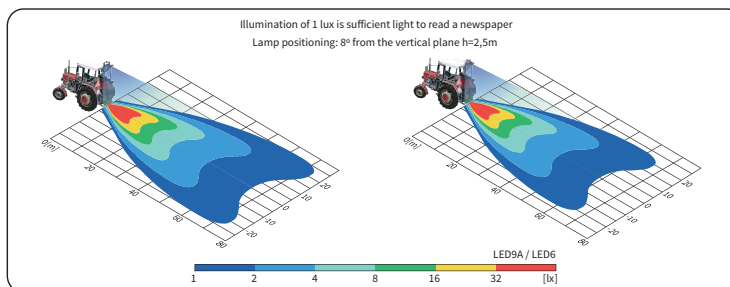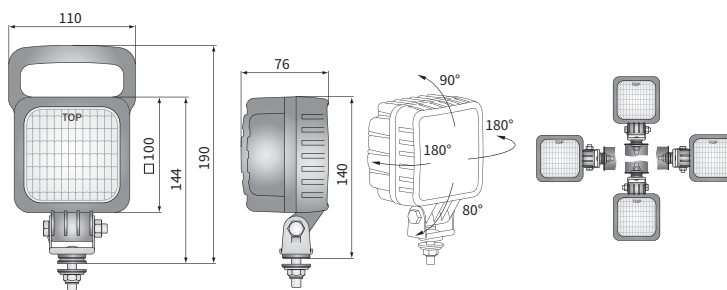

Cat. number	Luminous flux				IP rating	Certificates			Accessories	Connectors			
	3000 lm	2500 lm	2000 lm	1500 lm		ADR	LED module 12V-24V	LED module 12V-48V		LED module 48V	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5
LED9A.53700	✓												
LED9A.53780	✓												
LED9A.53706	✓									✓		2	
LED9A.53707	✓										✓	2	
LED9A.53712	✓										✓	2	
LED9A.53710	✓												
LED9A.53716	✓									✓		2	
LED9A.53717	✓										✓	2	
LED6.49800		✓											
LED6.49802		✓											
LED6.49880		✓											
LED6.49806		✓											
LED6.49807		✓									✓	2	
LED6.49812		✓									✓	2	
LED6.49810		✓											
LED6.49816		✓								✓		2	
LED6.49817		✓									✓	2	



TECHNICAL DATA / FEATURES


- dimensions: 100x100x76
- luminous flux of the LED module: 2000 lm, 1500 lm
- luminous flux of the lamp: 1600 lm, 1200 lm
- maximum power: 25W, 24W
- nominal voltage: 12V-24V DC, 12V-48V DC, 48V DC
- permissible power supply voltage: 10.5V-30V DC, 10.5V-60V DC, 40-60V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 66° x 20°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Equivalents for Hella:
 LED2.47500 - 1GA 996 189-001
 LED2.47507 - 1GA 996 189-011

DIMENSIONS

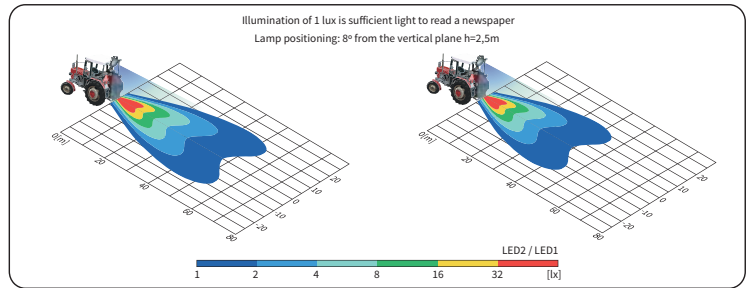

Cat. number	Luminous flux				IP rating	Certificates			Accessories	LED module 12V-24V				LED module 12V-48V				LED module 48V				Connectors
	3000 lm	2500 lm	2000 lm	1500 lm		IP66	IP67	IP69K		ADR	LED module 12V-24V	LED module 12V-48V	LED module 48V handle	cable 0,25 m	cable 0,5 m	cable 1 m ADR	switch	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin	
LED2.47500																						
LED2.47503																						
LED2.47580																						
LED2.47506																						2
LED2.47507																						2
LED2.47508																						2
LED2.47510																						
LED2.47516																						2
LED2.47517																						2
LED2.47550																						
LED2.47556																						2
LED2.47557																						2
LED1.46800																						
LED1.46813																						
LED1.46806																						2
LED1.46807																						2
LED1.46819																						2
LED1.46803																						2
LED1.46810																						
LED1.46816																						2
LED1.46817																						2
LED1.46840																						
LED1.46884																						
LED1.46846																						2
LED1.46847																						2
LED1.46850																						
LED1.46856																						2
LED1.46857																						2