CRC5 work lamps LED

TECHNICAL DATA / FEATURES

dimensions:	ϕ87x72
luminous flux of the LED module:	2000 lm, 1500 lm, 1000 lm
luminous flux of the lamp:	1600 lm, 1200 lm, 800 lm
maximum power:	21W, 18W, 14.5W
nominal voltage:	12V-24V DC
permissible power supply voltage:	10.5V-30V DC
source of light:	4 x LED
colour temperature:	5700-7000K
light distribution angle:	58°
IP rating:	IP67, IP69K, IP66
work temperature:	-40°C - +80°C
housing's material:	aluminium
lens' material:	plastic
built-in connectors:	AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
other:	protection: • against overheating • against reverse polarisation

ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.
Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:
deutsch plug DT06-2S 2-pin - cat. No. A.07135
AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
AMP Faston 250 plug 2-pin - cat. No. A.07138

Replacement parts:
neodymium magnet ϕ66/230N (1 pc.) - cat. No. CAR4.51315

Equivalents for Hella:
CRC5F.52001 - 1GO 996 476-001
CRC5E.51901 - 1GO 996 276-451
CRC5E.51906 - 1GO 996 276-481

DIMENSIONS

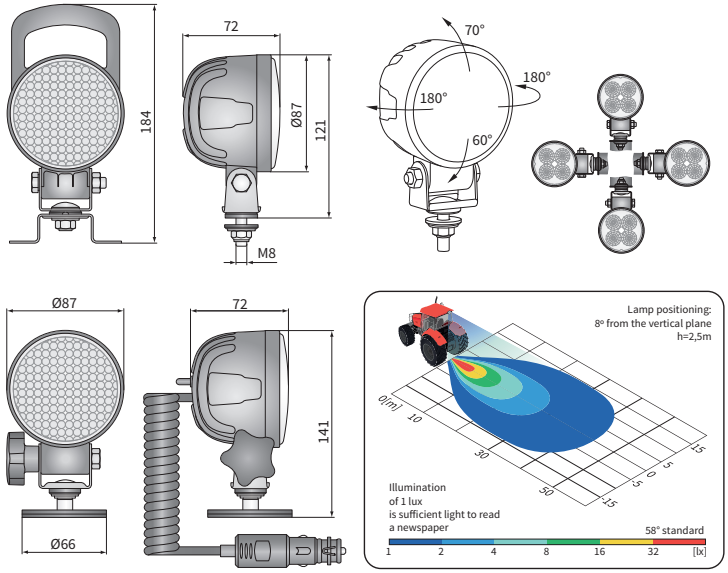

Cat. number	Luminous flux	2000 lm	1500 lm	1000 lm	IP rating	IP66	IP67	IP69K	Accessories	LED module 12V-24V	handle	cable 0,15 m	cable 0,5 m	cable 8 m	switch	cigarette lighter plug	neodymium magn. holder	case	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5
CRC5J.53401		✓					✓	✓		✓			✓									
CRC5J.53406		✓				✓		✓		✓										✓		
CRC5J.53414		✓					✓	✓		✓											✓	
CRC5J.53415		✓				✓		✓		✓												✓
CRC5J.53453		✓					✓	✓		✓				✓	✓	✓	✓					
CRC5J.53455		✓					✓	✓		✓	✓			✓	✓	✓	✓					
CRC5J.53456		✓					✓	✓		✓	✓			✓	✓	✓	✓	✓				
CRC5F.52001			✓				✓	✓		✓			✓									
CRC5F.52006			✓			✓		✓		✓										✓		
CRC5F.52014			✓				✓	✓		✓											✓	
CRC5F.52002			✓				✓	✓		✓		✓									✓	

Cat. number	Luminous flux	2000 lm	1500 lm	1000 lm	IP rating	IP66	IP67	IP69K	Accessories	LED module 12V-24V	handle	cable 0,15 m	cable 0,5 m	cable 8 m	switch	cigarette lighter plug	neodymium magn. holder	case	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5
CRC5F.52015			✓			✓		✓		✓												✓
CRC5F.52053			✓				✓	✓		✓				✓	✓	✓	✓					
CRC5F.52055			✓				✓	✓		✓	✓			✓	✓	✓	✓					
CRC5F.52056			✓				✓	✓		✓	✓			✓	✓	✓	✓	✓				
CRC5E.51901				✓			✓	✓		✓			✓									
CRC5E.51906				✓		✓		✓		✓										✓		
CRC5E.51914				✓			✓	✓		✓											✓	
CRC5E.51913				✓		✓		✓		✓												✓
CRC5E.51952				✓			✓	✓		✓				✓	✓	✓	✓					
CRC5E.51953				✓			✓	✓		✓	✓			✓	✓	✓	✓					
CRC5E.51956				✓			✓	✓		✓	✓			✓	✓	✓	✓	✓				