



TECHNICAL DATA / FEATURES

- dimensions: 138x78x68
- source of light: H3
- maximum power: 70W
- nominal voltage: 12V-24V DC
- optics: FF, standard
- light distribution angle: 63° x 45°, 46° x 15°
- IP rating: IP66
- housing's material: plastic
- housing's colour: black
- lens' material: glass
- built-in connectors: -
- other: semipermeable membrane



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

Mounting: as a freestanding on body panels. They can be installed in an upright or upside down position.

It is possible to install needed connectors on wire (on request).



Useful parts while installing:

- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP Superseal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138

Additional equipment:

- stone guard - cat. No. A.37900
- lens cover - cat. No. A.37901

DIMENSIONS

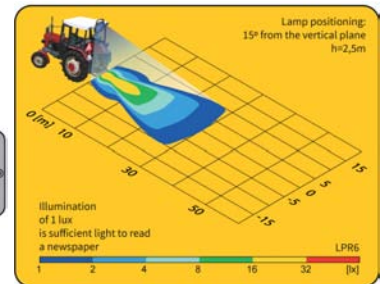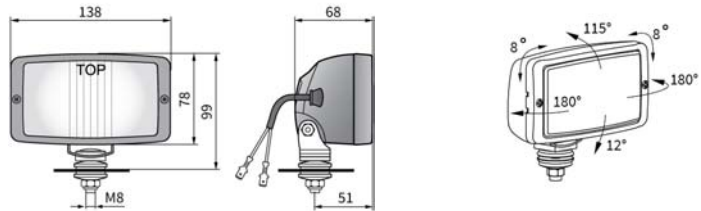

Cat. number	Optics		Type	H3	Beam angle		Lens	glass	polycarbonate	Accessories	Connectors				Mounting	bracket	spoiler / recess	Application	universal	dedicated	Packaging / pc	blister pack	carton box
	FF	standard			63° x 45°	46° x 15°					AMP Faston 250	AMP Superseal 1,5	Deutsch DT	Cap / Pin									
LPR6FF.46401	✓			✓	✓		✓								✓			✓				1	1
LPR6FF.46400	✓			✓	✓		✓								✓			✓				1	1
LPR6FF.46410	✓			✓	✓		✓								✓			✓				1	1
LPR6FF.46420	✓			✓	✓		✓								✓			✓				1	1
LPR6FF.46411	✓			✓	✓		✓								✓	2		✓				1	1
LPR6.27381		✓		✓		✓	✓								✓			✓				1	1
LPR6.27382		✓		✓		✓	✓								✓			✓				1	1
LPR6.27383		✓		✓		✓	✓								✓			✓				1	1
LPR6.27392		✓		✓		✓	✓								✓	2		✓				1	1
LPR6.27393		✓		✓		✓	✓								✓	2		✓				1	1
LPR6.27385		✓		✓		✓	✓								✓	2		✓				1	1