

LED work lamps with other holders



TECHNICAL DATA / FEATURES

dimensions: 100x100x76
 luminous flux of the LED module: 3000 lm, 2500 lm, 2000 lm, 1500 lm
 luminous flux of the lamp: 2400 lm, 2000 lm, 1600 lm, 1200 lm
 maximum power: 30W, 29W, 25W, 19W
 nominal voltage: 12V-24V DC, 48V DC
 permissible power supply voltage: 10.5V-30V DC, 40-60V DC
 source of light: 6 x LED
 colour temperature: 5000-7000K
 light distribution angle: 66° x 20°
 IP rating: IP67, IP69K
 work temperature: -40°C - +80°C
 housing's material: aluminium/plastic
 lens' material: plastic
 built-in connectors: AMP Faston 250
 other: protection:
 • against overheating
 • against reverse polarisation
 bracket made of Inox steel



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.



The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to its influence.

Correct polarity required.

Replacement parts:

neodymium magnet φ89/500N (1 pc.) - cat. No. CAR4.51320

DIMENSIONS

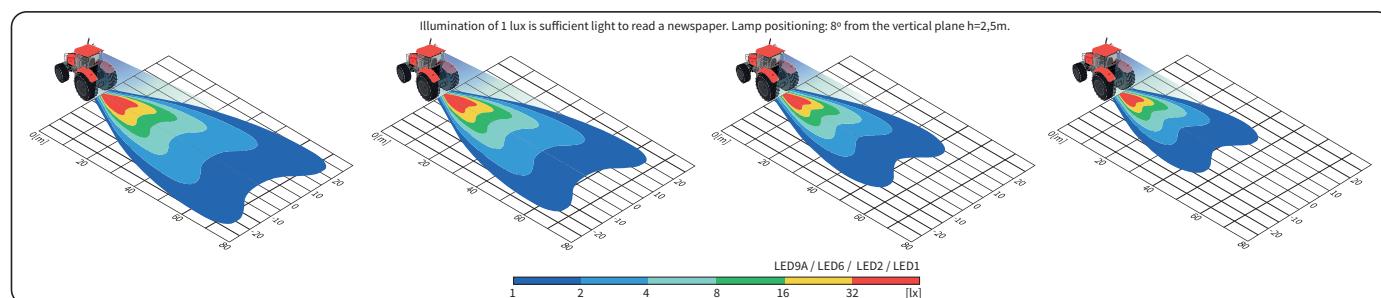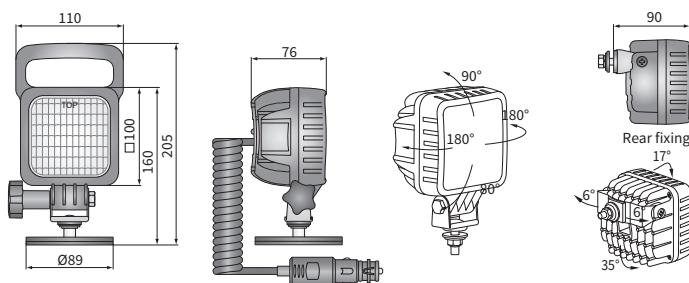

Cat. number	Luminous flux	IP rating	Accessories	Mounting method	Connectors
LED9A.53795	✓ 3000 lm	✓ IP67	✓ LED module 12V-24V	✓ any	✓ AMP Faston 250
LED9A.53796	✓ 2500 lm	✓ IP69K	✓ LED module 48V	✓ installed vertically up	✓ Deutsch DT
LED6.49895	✓ 2000 lm	✓	✓ handle	✓ rear	✓ AMP SuperSeal 1,5
LED6.49896	✓ 1500 lm	✓	✓ cable 0,22 m	✓	✓ Cap / Pin
LED6.49897		✓	✓ cable 0,5 m	✓	
LED6.49825		✓	✓ cable 8 m	✓	
LED2.47595		✓	✓ switch	✓	
LED2.47596		✓	✓ cigarette lighter plug	✓	
LED2.47597		✓		✓	
LED2.47525		✓		✓	
LED1.46831		✓		✓	
LED1.46832		✓		✓	
LED1.46833		✓		✓	
LED1.46818		✓		✓	
LED1.46825		✓		✓	
LED1.46834		✓		✓	
LED1.46835		✓		✓	