



## TECHNICAL DATA / FEATURES

- dimensions:  $\phi 87 \times 72$
- luminous flux of the LED module: 2000 lm, 1500 lm, 1000 lm
- luminous flux of the lamp: 1600 lm, 1200 lm, 800 lm
- maximum power: 21W, 18W, 14.5W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 4 x LED
- colour temperature: 5700-7000K
- light distribution angle: 58°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
  - against overheating
  - against reverse polarisation



## ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138


Replacement parts:

- neodymium magnet  $\phi 66/230N$  (1 pc.) - cat. No. CAR4.51315

Equivalents for Hella:

- CRC5F.52001 - IGO 996 476-001
- CRC5E.51901 - IGO 996 276-451
- CRC5E.51906 - IGO 996 276-481

## DIMENSIONS

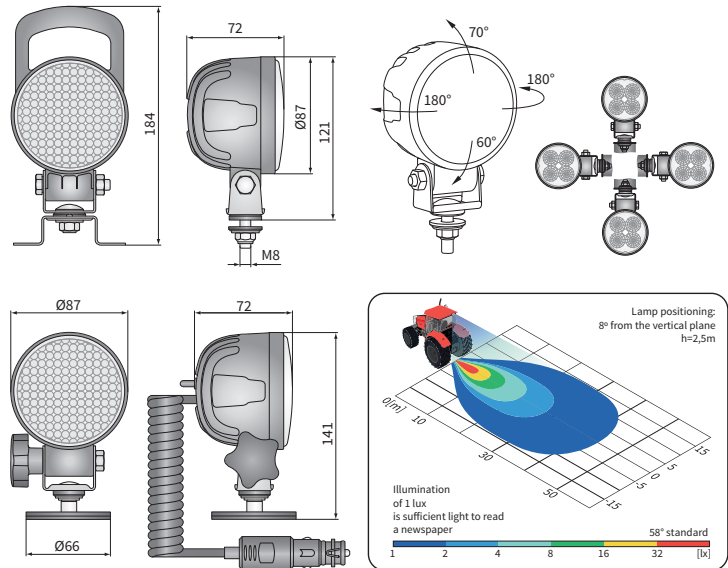

Cat. number	Luminous flux			IP rating	IP66	IP67	IP69K	Accessories							Connectors				
	2000 lm	1500 lm	1000 lm					LED module 12V-24V handle	cable 0,15 m	cable 0,5 m	cable 8 m	switch	cigarette lighter plug	neodymium magn. holder	case	AMP Faston 250	Deutsch DT	AMP SuperSeal 1.5	
<b>CRC5J.53401</b>	✓				✓	✓	✓	✓	✓										
CRC5J.53406	✓				✓	✓	✓	✓	✓								✓		
<b>CRC5J.53414</b>	✓				✓	✓	✓	✓	✓										
CRC5J.53415	✓				✓	✓	✓	✓	✓									✓	
CRC5J.53453	✓				✓	✓	✓	✓	✓										
CRC5J.53455	✓				✓	✓	✓	✓	✓										
<b>CRC5J.53456</b>	✓				✓	✓	✓	✓	✓										
<b>CRC5F.52001</b>		✓			✓	✓	✓	✓	✓										
CRC5F.52006		✓			✓	✓	✓	✓	✓								✓		
<b>CRC5F.52014</b>		✓			✓	✓	✓	✓	✓								✓		
CRC5F.52002		✓			✓	✓	✓	✓	✓								✓		

Cat. number	Luminous flux			IP rating	IP66	IP67	IP69K	Accessories							Connectors				
	2000 lm	1500 lm	1000 lm					LED module 12V-24V handle	cable 0,15 m	cable 0,5 m	cable 8 m	switch	cigarette lighter plug	neodymium magn. holder	case	AMP Faston 250	Deutsch DT	AMP SuperSeal 1.5	
CRC5F.52015			✓		✓	✓	✓	✓	✓										
CRC5F.52053			✓		✓	✓	✓	✓	✓										
CRC5F.52055			✓		✓	✓	✓	✓	✓										
<b>CRC5F.52056</b>			✓		✓	✓	✓	✓	✓										
<b>CRC5E.51901</b>			✓		✓	✓	✓	✓	✓										
CRC5E.51906			✓		✓	✓	✓	✓	✓									✓	
<b>CRC5E.51914</b>			✓		✓	✓	✓	✓	✓									✓	
CRC5E.51913			✓		✓	✓	✓	✓	✓										✓
CRC5E.51952			✓		✓	✓	✓	✓	✓										
CRC5E.51953			✓		✓	✓	✓	✓	✓										
<b>CRC5E.51956</b>			✓		✓	✓	✓	✓	✓										