



TECHNICAL DATA / FEATURES

- dimensions: 105x105x50
- function markings: AR
- luminous flux of the LED module: 1600 lm, 800 lm
- luminous flux of the lamp: 1300 lm, 650 lm
- maximum power: 22W, 11W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 12 x LED, 6 x LED
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: Deutsch DT, AMP SuperSeal 1.5
- protection:
 - other:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION



Particularly recommended for trucks and vans.
 The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.
 Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:
 AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
 deutsch plug DT06-2S 2-pin - cat. No. A.07135

DIMENSIONS

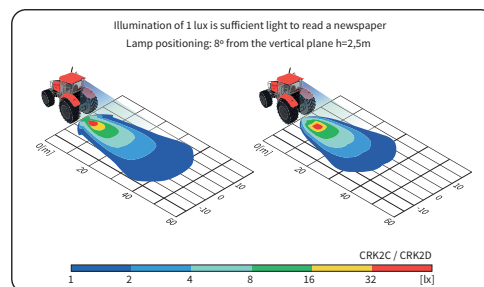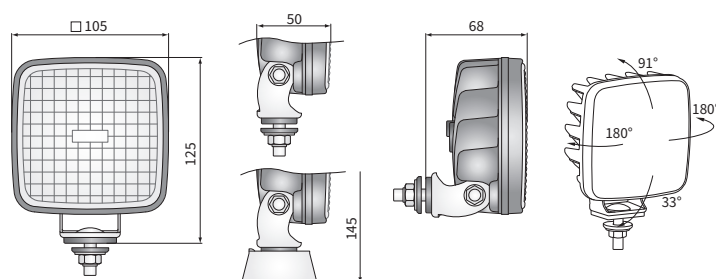

Cat. number	Homologation code	Luminous flux		Rated power		IP rating		Type	Accessories	Connectors	Bracket	Packaging / pc	Packing	
		1600 lm	800 lm	22W	11W	IP67	IP69K						carton box	blister pack
CRK2C.54900	104	✓		✓		✓	✓	✓	✓		✓	1		
CRK2C.54910	104	✓		✓		✓	✓	✓	✓		✓		1	
CRK2C.54950	104	✓		✓		✓	✓	✓	✓	✓	✓	1		
CRK2C.54970	104	✓		✓		✓	✓	✓	✓	✓	✓	1		
CRK2D.55700	107		✓		✓	✓	✓	✓	✓		✓	1		
CRK2D.55750	107		✓		✓	✓	✓	✓	✓	✓	✓	1		
CRK2C.54940	104	✓		✓		✓	✓	✓	✓		✓	1		
CRK2C.54960	104	✓		✓		✓	✓	✓	✓	✓	✓	1		
CRK2C.54980	104	✓		✓		✓	✓	✓	✓	✓	✓	1		