

ORIGINAL LINE S1

Original spare part



The cost-effective original spare parts for motorcycles

OSRAM ORIGINAL LINE motorcycle lamps offer convincing performance for standard requirements, are robust and cost-effective. They have already been successfully used in millions of new vehicles from renowned manufacturers, whether as standard initial equipment or original spare parts. Convince yourself of the excellent value for money, the reliable OEM quality and the wide product range of the ORIGINAL LINE.

Product datasheet

Technical data


Product information

Order reference	62325
Application (Category and Product specific)	Halogen headlight lamp

Electrical data

Nominal voltage	12.0 V
Nominal wattage	25/25 W
Test voltage	13.2 V

Dimensions & weight

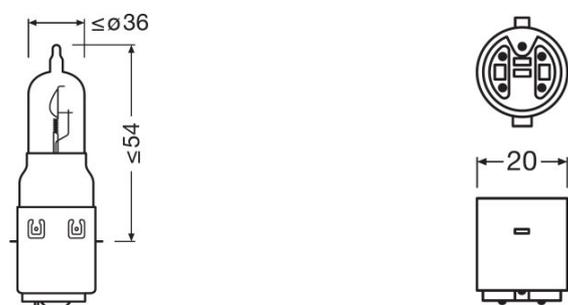

Length	71.0 mm
Diameter	15.0 mm
Product weight	13.39 g

Lifespan

Lifespan B3	100 / 200 h
Lifespan Tc	200 / 400 h

Additional product data

Base (standard designation)	BA20d
-----------------------------	-------

Capabilities

Technology	HAL
------------	-----

Certificates & standards

ECE category	S1
--------------	----

Product datasheet

Country specific categorizations

Order reference	62325
-----------------	-------

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899157774	ORIGINAL LINE S1	Folding carton box 1	30 mm x 30 mm x 77 mm	0.07 dm ³	16.30 g
4052899157781	ORIGINAL LINE S1	Bundle 10	- x - x -		
4052899157798	ORIGINAL LINE S1	Shipping carton box 100	400 mm x 160 mm x 135 mm	8.64 dm ³	1806.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

File
 360 Degree Image ORIGINAL S1 64326

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.



OSRAM