

CRC3-FF 50° LED work lamps with other holders



TECHNICAL DATA / FEATURES

dimensions: $\phi 117 \times 74$
 luminous flux of the LED module: 2500 lm, 2000 lm, 1500 lm
 luminous flux of the lamp: 2000 lm, 1600 lm, 1200 lm
 maximum power: 29W, 25W, 24W
 nominal voltage: 12V-24V DC
 permissible power supply voltage: 10.5V-30V DC
 source of light: 6 x LED
 colour temperature: 5000-7000K
 light distribution angle: 50°
 IP rating: IP67, IP69K
 work temperature: -40°C - +80°C
 housing's material: aluminium/plastic
 lens' material: plastic
 built-in connectors: AMP Faston 250, Deutsch DT
 other: protection:
 • against overheating
 • against reverse polarisation
 bracket made of Inox steel



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to its influence.

Correct polarity required.

Equipped with removable protective grille.

It is possible to install needed connectors for a version with cable (on request).



Replacement parts:

brackets - cat. No. CAR1.47300
neodymium magnet $\phi 89/500\text{N}$ (1 pc.) - cat. No. CAR4.51320

Useful parts while installing:

AMP Faston 250 plug 2-pin - cat. No. A.07138
deutsch plug DT06-2S 2-pin - cat. No. A.07135

DIMENSIONS

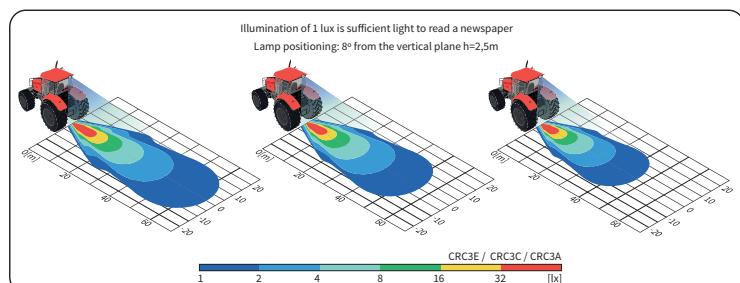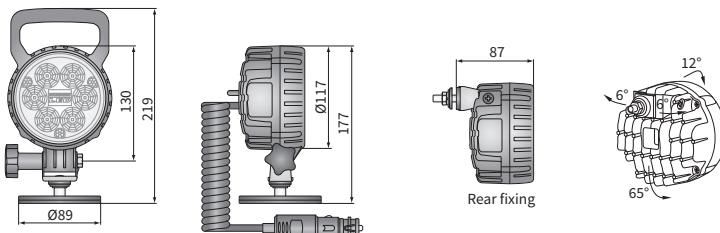

Cat. number	Luminous flux	IP rating	Accessories	Mounting method	Bracket	Connectors												
CRC3E.50396	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
CRC3E.50397	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRC3E.50341	✓		✓															
CRC3E.50340	✓		✓															
CRC3E.50395	✓		✓															
CRC3E.50325	✓		✓															
CRC3E.50329	✓		✓															
CRC3C.50195	✓		✓															
CRC3C.50196	✓		✓															
CRC3C.50125	✓		✓															
CRC3A.48790	✓		✓															
CRC3A.48791	✓		✓															
CRC3A.48739	✓		✓															
CRC3A.48738	✓		✓															
CRC3A.48725	✓		✓															