



TECHNICAL DATA / FEATURES

- dimensions: $\phi 117 \times 74$
- luminous flux of the LED module: 2500 lm, 2000 lm, 1500 lm
- luminous flux of the lamp: 2000 lm, 1600 lm, 1200 lm
- maximum power: 29W, 25W, 24W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 4°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: Deutsch DT, AMP Faston 250
- other: protection:
 - against overheating
 - against reverse polarisation
- bracket made of Inox steel



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Equipped with removable protective grille.

It is possible to install needed connectors for a version with cable (on request).

Replacement parts:

brackets - cat. No. CAR1.47300



neodymium magnet $\phi 89/500N$ (1 pc.) - cat. No. CAR4.51320

Useful parts while installing:

AMP Faston 250 plug 2-pin - cat. No. A.07138

deutsch plug DT06-2S 2-pin - cat. No. A.07135

DIMENSIONS

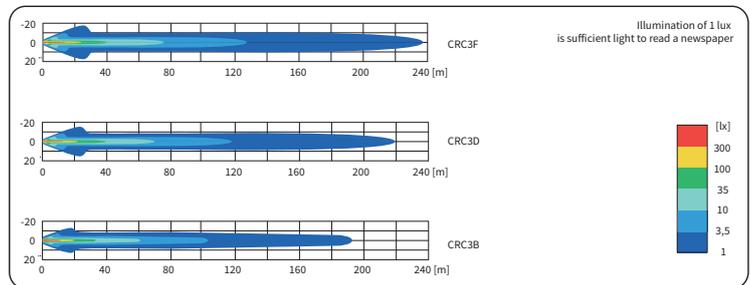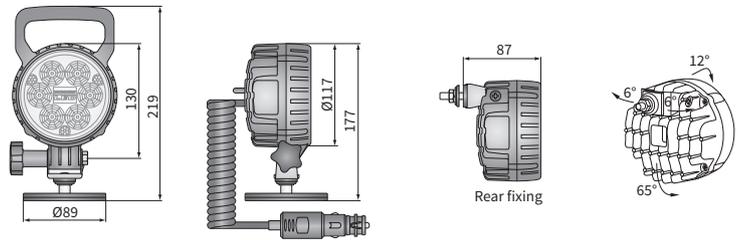

Cat. number	Luminous flux			IP rating	IP67	IP69K	Accessories	LED module 12V-24V/ handle	cable 0,5 m	cable 8 m	switch	cigarette lighter plug	Mounting method	any	installed vertically up	rear	Bracket	neodymium magn.	CAR1	CAR3	M8	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin
	2500 lm	2000 lm	1500 lm																							
CRC3F.50495	✓				✓	✓								✓												
CRC3F.50496	✓				✓	✓								✓												
CRC3F.50497	✓				✓	✓								✓										✓		2
CRC3F.50441	✓				✓	✓								✓									✓			2
CRC3F.50440	✓				✓	✓								✓									✓			2
CRC3F.50425	✓				✓	✓				✓																
CRC3F.50429	✓				✓	✓																	✓			2
CRC3D.50294		✓			✓	✓								✓												
CRC3D.50295		✓			✓	✓				✓				✓												
CRC3D.50225		✓			✓	✓																				
CRC3B.49294			✓		✓	✓								✓												
CRC3B.49295			✓		✓	✓								✓												
CRC3B.49239					✓	✓								✓									✓			2
CRC3B.49238					✓	✓								✓									✓			2
CRC3B.49225					✓	✓								✓												