

# Round VX80-WD



### ECE certified - ECE R112

The necessary tests and approvals were carried out and an ECE type approval was granted. ECE reference number: 12.5



### Wide Beam

Designed for a near field illumination. For large area illumination in the near field of the vehicle



### Light beam up to 240 m length

See and be seen with OSRAM



### on-road & off-road

Versatile applicable and flexible in use. On-road & off-road, in terrain, at work and in the spare time.

## Product datasheet



### Bringing light to life with OSRAM LEDriving driving and working lights

Considerable foresight on dark country roads, forest paths, off the beaten tracks, off-road and on-road- this can be achieved with the OSRAM LEDriving Round VX80-WD. With its 4 powerful, high-performance long-life LEDs, the OSRAM LEDriving Round VX80-WD has a range of up to 240 meters and thus offers the driver impressive foresight on-road and off-road. Even in dim light and reduced visibility due to external environmental influences, the OSRAM LEDriving Round VX80-WD with up to 6000 Kelvin can provide conditions similar to daylight. The power package with up to 1150 lumens of luminosity scores with highest optical efficiency and homogeneous light distribution. This results in the possibility of an improved view for you and the improved visibility of your vehicle by other road users, and consequently also increased safety on-road and off-road. Whether on-road or off-road – The OSRAM LEDriving Round VX80-WD impresses with its powerful performance and a long service life with up to 5000 hours. Versatile applicable, it defies numerous environmental influences and, thanks to high-quality materials such as the aluminum housing and the stable polycarbonate lens, it is particularly light and at the same time robust and resistant. The OSRAM LEDriving Round VX80-WD has been tested and validated with the IP-Protection Class IP67 in our DIN certified environmental simulation laboratory for extreme external influences regarding water, dust, impacts, heat, cold and permanent vibration. The integrated driver and the thermal management system regulate the temperature of the OSRAM LEDriving Round VX80-WD and can thus prevent damage from overheating. The polarity protection inhibits the wrong polarity of the voltage supply and can thus prevent possible damage by automatically switching off the LEDs. On-road and off-road, the OSRAM LEDriving Round VX80-WD is an effective and efficient addition to your vehicle. No registration or entry in the vehicle documents is necessary for these ECE-certified LED driving lights<sup>2</sup>). ECE reference number: 12.5 The OSRAM LEDriving Round VX80-WD can be attached to cars, trucks, agricultural machinery, farm machinery, commercial vehicles, construction vehicles, caravans, off-road vehicles and quads<sup>2</sup>). The OSRAM LEDriving Round VX80-WD is versatile applicable and flexible in use.<sup>2</sup>) OSRAM LEDriving Driving Lights are approved according to ECE regulations and may therefore be installed and operated on public roads. Please note: Special installation regulations apply. In addition to ECE approval of the product, individual special requirements and legislation of the countries must be observed.

## Product datasheet

---

### Technical data

#### Product information

Order reference	LEDDL119-WD
Application (Category and Product specific)	Additional high beam application

#### Electrical data

Nominal voltage	12/24 V
Nominal wattage	7.50 W
Test voltage	13.5 V

#### Photometrical data


Luminous flux	1150 lm
Color temperature	6000 K
Light distance at 1lx	240 m

#### LED module information

Number of LEDs per module	4
---------------------------	---

#### Dimensions & weight

---




Product weight	510.00 g
Length	65 mm
Width	82 mm
Height	83 mm

#### Lifespan

Lifespan Tc	5000 h
Guarantee	2 years

## Additional product data

---

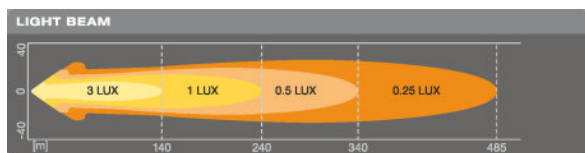

---

Luminous intensity distribution

Connector to lamp	Open wire
Product remark	Beam Pattern: Wide

### Capabilities

Technology	LED <sup>1)</sup>
------------	-------------------

<sup>1)</sup> Light-emitting diode application

### Certificates & standards

Standards	ECE R10, R112
Approval marks – approval	E4 approval
Type of protection	IP67

### Country specific categorizations

Order reference	LEDDL119-WD
-----------------	-------------

### Logistical data

Commodity code	851220009000
----------------	--------------

---



### Logistical Data

## Product datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172150712	Round VX80-WD	Folding carton box 1	- x - x -		
4062172150729	Round VX80-WD	Shipping carton box 8	277 mm x 197 mm x 224 mm	12.22 dm <sup>3</sup>	4720.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Download Data

File
 User instruction LEDriving Round VX80-WD
 360 Degree Image Round VX80-WD LEDDL119-WD

#### Legal advice:

The installation of the OSRAM LEDriving Round VX80-WD is fully ECE compliant and therefore registration free. This does not include individual custom requirements of countries, in addition to the standardized ECE certification of the product.

1) Precise terms and conditions at: [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

2) OSRAM LEDriving Driving Lights are approved according to ECE regulations and may therefore be installed and operated on public roads. Please note: Special installation regulations apply. In addition to ECE approval of the product, individual special requirements and legislation of the countries must be observed.

Refer to [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee) for precise conditions

#### Application advice

For more detailed application information and graphics please see product datasheet.

#### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

# OSRAM